
Adattatori DIN2353 / DIN2353 Adaptors


Pagina / Page	175	176

Nut



OL7100
NUT


Cutting rings



OL7105
CUTTING RING


Pagina / Page	25-giu	178-180	181	182-183	184-185

HY-RING



OL7110
HY-RING™
Kit NUT/RING

Male stud couplings



OL7115/6/7
BSP - Metric


OL7120
UN/UNF-2A

OL7125-OL7126
M. STUD CUOPLINGRUBBER SEAL

OL7130/1/2
BSPT - Metric Taper - NPT


Pagina / Page	186-187	188	189-190	191	192

Male stud elbow

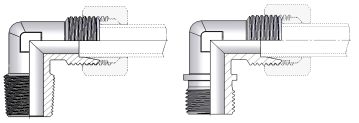

OL7135/6/7
BSPT/Metr Taper/NPT

OL7140-OL7141
BSP - Metric




OL7145
ADJ. MALE - BSPP

OL7150
ADJ. MALE - UNF

OL7155
ADJ. MALE - Metric


Pagina / Page	193-194	195	196	197

Male stud branch T



OL7160/1/2
BSPT - Metric Taper - NPT

OL7165-OL7166
BSP - Metric




OL7170
ADJ. MALE - BSPP

OL7175
ADJ. MALE - UNF


Pagina / Page	198	199	200	201

Male stud run T



OL7180-OL7181
BSPT - Metric Taper

OL7185-OL7186
BSP - Metric

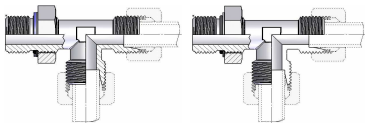


OL7190
ADJ. MALE - BSPP

OL7195
ADJ. MALE - UNF

Pagina / Page	202	203	204	205	206

Union



OL7200
STRAIGHT COUPLING

OL7205
REDUCED STRAIGHT COUPLING

OL7210
EQUAL ELBOW

OL7215
EQUAL TEE
























OL7220
EQUAL CROSS

Dimensions and general characteristics may be changed at any time without prior notice.

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product

Any use of the product not in conformance with our instructions may be dangerous.

Adattatori DIN2353 / DIN2353 Adaptors















Pagina / Page	207	208				
Bulkhead Union						
	OL7225 STRAIGHT BULKHEAD UNION	**OL7230** BULKHEAD 90°ELBOW UNION				
Pagina / Page	209-210	211-212	213	214	215	216-217
Standpipe Adaptors						
	OL7235-OL7236 Packing ring/ O-Ring Seal - BSP/Metric	**OL7240-OL7241** Tube Reducers 'L-S' Series with O-Ring Seal	**OL7245** Straight coupling with O-Ring	**OL7250-OL7271** Stud /Standpipe Adaptors-BSP/Metric	**OL7255** Stud /Standpipe Adaptors -NPT	**OL7260-OL7261** Standpipe/Tube Reducers
Pagina / Page	218	218		219	219	
Swivel elbow						
	OL7265 Angular rotary fitting	**OL7270** Swivel Elbows		**OL7275** Angular rotary fitting with O-Ring Seal	**OL7280** Swivel Elbows with O-Ring Seal - BSP/Metric	
Pagina / Page	220	220		221	221	
Swivel branch T						
	OL7285 Rotary fitting a Tees	**OL7290** Swivel Branch Tees - BSP		**OL7295** Rotary fitting a Tees with O-Ring Seal	**OL7300** Swivel Branch Tees with O-Ring Seal -	
Pagina / Page	222	222		223	223	
Swivel run T						
	OL7305 Rotary fitting a L	**OL7310** Swivel Barrel Tees - BSP		**OL7315** Rotary fitting a L with O-Ring Seal	**OL7320** Swivel Barrel Tees with O-Ring Seal -	
Pagina / Page	224	225-226		227-228		
Banjos						
	OL7325-OL7325 Banjos - BSP/Metric	**OL7330-OL7331** Banjos - BSP/Metric with O. ring seal		**OL7335-OL7336** Double orientable fitting - BSP/Metric		

Dimensions and general characteristics may be changed at any time without prior notice.

Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product

Any use of the product not in conformance with our instructions may be dangerous.

Adattatori DIN2353 / DIN2353 Adaptors

Pagina / Page	229	230		231		232
M/F Adaptors			Gauge coupling		F stud coupling	
	OL7340 type A - BSP	**OL7345** type B - BSP		**OL7350** GAUGE COUPLING		**OL7355-OL7356** BSP/Metric
Pagina / Page	233			234	235	236
Pipe insert			Plug			
	OL7360 PIPE INSERT			**OL2605-OL2655** INNER HEXAGON PLUGPACKING RING	**OL2690** PIPE PLUG	**OL2695** PIPE PLUG WITH O-RING SEAL
Pagina / Page	236	237	238			
Welding						
	OL7365 WELDING NIPPLES WITH OR SEAL	**OL7370** WELDING BOSS	**OL7375** WELDING BULKHEAD CONNECTION			
Pagina / Page	239	240	241			
not-return valves						
	OL7380 NON-RETURN VALVES	**OL7385-OL7386** BSP INIET	**OL7390-OL7391** BSP OUTLET			


Dimensions and general characteristics may be changed at any time without prior notice.


Data contained herein are for information purpose only, and it does not enlarge, amend or imply any warranty other than provided by us with the product

Any use of the product not in conformance with our instructions may be dangerous.

OL7100 Dado di serraggio 1002..

Nuts




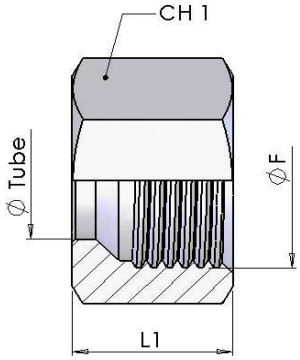


W.P.		part number	Ø tube	thread	Dimensions	
bar			mm	F	L_1	CH_1
LL	100	**OL7100-01**	4	M 8x1	11	10
		OL7100-02	6	M 10x1	11,5	12
		OL7100-03	8	M 12x1	12	14
		OL7100-04	10	M 14x1	12,5	17
		OL7100-05	12	M 16x1	13	19
L	315	**OL7100-06**	6	M 12x1,5	14,5	14
		OL7100-07	8	M 14x1,5	14,5	17
		OL7100-08	10	M 16x1,5	15,5	19
		OL7100-09	12	M 18x1,5	15,5	22
		OL7100-10	15	M 22x1,5	17	27
		OL7100-11	18	M 26x1,5	18	32
	160	**OL7100-12**	22	M 30x2	20	36
		OL7100-13	28	M 36x2	21	41
		OL7100-14	35	M 45x2	24	50
		OL7100-15	42	M 52x2	24	60
S	630	**OL7100-16**	6	M 14x1,5	16,5	17
		OL7100-17	8	M 16x1,5	16,5	19
		OL7100-18	10	M 18x1,5	17,5	22
		OL7100-19	12	M 20x1,5	17,5	24
		OL7100-20	14	M 22x1,5	20,5	27
	400	**OL7100-21**	16	M 24x1,5	20,5	30
		OL7100-22	20	M 30x2	24	36
		OL7100-23	25	M 36x2	27	46
		OL7100-24	30	M 42x2	29	50
	315	**OL7100-25**	38	M 52x2	32,5	60

OL7105 Anellino tagliente 1001..

Cutting Rings






W.P.		part number	Ø tube	Dimensions			
bar			mm		L1	D	
LL	100	**OL7105-01**	4		6	6	
		OL7105-02	6		7	8	
		OL7105-03	8		7	10	
		OL7105-04	10		9,5	10	
		OL7105-05	12		9,5	12	
LS	315	**OL7105-06**	6		9,5	10	
		OL7105-07	8		9,5	12	
	630	**OL7105-08**	10		10	14	
		OL7105-09	12		10	16	
L	315	**OL7105-10**	15		10	19	
		OL7105-11	18		10	23	
	160	**OL7105-12**	22		10,5	27	
		OL7105-13	28		11	33	
		OL7105-14	35		13	41	
		OL7105-15	42		13	48	
S	630	**OL7105-16**	14		10	19	
	400	**OL7105-17**	16		10,5	21	
		OL7105-18	20		12	26	
		OL7105-19	25		12	32	
		OL7105-20	30		13	36	
	630	**OL7105-21**	38		13	44	

OL7110 *HY-RING™ - Kit dado/anello*

HY-RING™ - Kit nut/ring

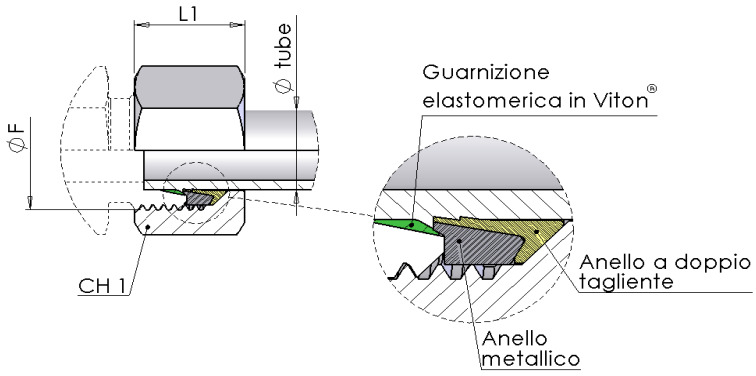

Caratteristiche:

- Il kit HY-RING™ è composto da: Anello a doppio tagliente e Anello metallico integrati nel dado DIN più una guarnizione elastomerica
- La guarnizione elastomerica viene fornita in Viton®. Disponibile, su richiesta, in NBR, EPDM e FKM.
- Rispetto all'anello tagliente tradizionale (tenuta ferro/ferro) la tenuta è migliorata dalla guarnizione elastomerica.
- La guarnizione elastomerica è di facile sostituzione. Per evitarne il danneggiamento, viene inserita successivamente al premontaggio.
- La parte metallica dell'Anello metallico è temprata per evitare che venga intagliato dall'anello a doppio tagliente. Riduce i problemi di tolleranza e controlla con precisione l'intaglio sul tubo
- Le ridotte profondità di intaglio lo rendono adatto anche per spessori sottili.


Features:


- *The HY-RING™ kit is composed by: Cutting ring (two-cut), Metal outer ring (support ring) integrated with the DIN nut plus one elastomeric seal*
- *The standard elastomeric seal is supplied in Viton®. Available on request in NBR, EPDM e FKM.*
- *Compared to the traditional cutting ring (iron/iron seal) seal is improved by the elastomeric seal.*
- *The standard elastomeric seal is easy to replace. To avoid any damage is fitted after the pre-assembly*
- *The support ring has been hardened to prevent to be engraved by the cuttin ring. It reduces tolerance problems and consents accurately to define the cut*
- *Reduced cutting depth make it suitable for thin thicknesses.*

W.P.		part number	Ø tube	thread	Dimensions	
bar			mm	F	L_1	CH_1
L	500	**OL7110-01**	6	M 12x1,5	14,5	14
		OL7110-02	8	M 14x1,5	14,5	17
	400	**OL7110-03**	10	M 16x1,5	15,5	19
		OL7110-04	12	M 18x1,5	15,5	22
		OL7110-05	15	M 22x1,5	17	27
		OL7110-06	18	M 26x1,5	18	32
	250	**OL7110-07**	22	M 30x2	20	36
		OL7110-08	28	M 36x2	21	41
		OL7110-09	35	M 45x2	24	50
		OL7110-10	42	M 52x2	24	60
S	800	**OL7110-11**	6	M 14x1,5	16,5	17
		OL7110-12	8	M 16x1,5	16,5	19
		OL7110-13	10	M 18x1,5	17,5	22
	630	**OL7110-14**	12	M 20x1,5	17,5	24
	420	**OL7110-15**	16	M 24x1,5	20,5	30
		OL7110-16	20	M 30x2	24	36
		OL7110-17	25	M 36x2	27	46
		OL7110-18	30	M 42x2	29	50
		OL7110-19	38	M 52x2	32,5	60

OL7115 Terminale diritto

Male Stud Couplings



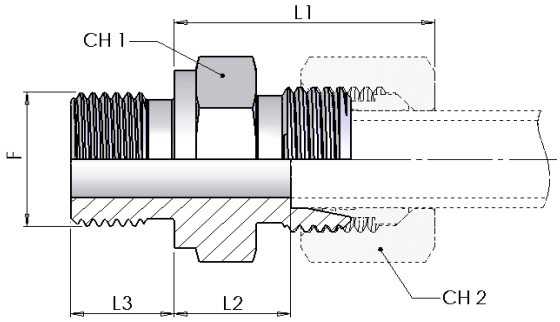



Filettatura / Thread:
BSPP (Form B DIN 3852)

W.P.		part number (body only)	Ø tube	thread	Dimensions				
bar			mm	F	L1	L2	L3	CH1	CH2
L	315	OL7115-01	6	G 1/8	23	8,5	8	14	14
		OL7115-02	6	G 1/4	24,5	10	12	19	14
		OL7115-03	6	G 3/8	26	11,5	12	22	14
		OL7115-04	6	G 1/2	27	12	14	27	14
		OL7115-05	8	G 1/4	25	10	12	19	17
		OL7115-06	8	G 1/8	24,5	9,5	8	14	17
		OL7115-07	8	G 3/8	26,5	11,5	12	22	17
		OL7115-08	8	G 1/2	27	12	14	27	17
		OL7115-09	10	G 1/4	26	11	12	19	19
		OL7115-10	10	G 1/8	25,5	10,5	8	17	19
		OL7115-11	10	G 3/8	27,5	12,5	12	22	19
		OL7115-12	10	G 1/2	28	13	14	27	19
		OL7115-13	12	G 3/8	27	12,5	12	22	22
		OL7115-14	12	G 1/4	26,5	12	12	19	22
		OL7115-15	12	G 1/2	27,5	13	14	27	22
		OL7115-16	12	G 3/4	29	14	16	32	22
		OL7115-17	15	G 1/2	29	14	14	27	27
		OL7115-18	15	G 3/8	28,5	13,5	12	24	27
		OL7115-19	15	G 3/4	30	15	16	32	27
		OL7115-20	18	G 1/2	31	14,5	14	27	32
		OL7115-21	18	G 3/8	29	14	12	27	32
		OL7115-22	18	G 3/4	31	14,5	16	32	32
	160	OL7115-23	22	G 3/4	33	16,5	16	32	36
		OL7115-24	22	G 1/2	33	16,5	14	32	36
		OL7115-25	22	G 1	34	17,5	18	41	36
		OL7115-26	28	G 1	34	17,5	18	41	41
		OL7115-27	28	G 3/4	34	17,5	16	41	41
		OL7115-28	35	G 1 1/4	39	17,5	20	50	50
		OL7115-29	35	G 1/2	39	17,5	18	46	50
		OL7115-30	42	G 1 1/2	42	19	22	55	60

OL7116 Terminale diritto

Male Stud Couplings



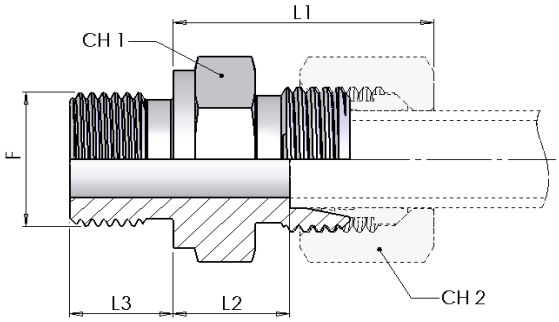


Filettatura / Thread:
BSPP (Form B DIN 3852)


W.P.		part number (body only)	Ø tube	thread	Dimensions				
bar			mm	F	L_1	L_2	L_3	CH_1	CH_2
S	630	OL7116-01	6	G 1/4	28	13	12	19	17
		OL7116-02	6	G 1/2	33	18	14	27	17
		OL7116-03	8	G 1/4	30	15	12	19	19
		OL7116-04	8	G 3/8	30,5	15,5	12	22	19
		OL7116-05	10	G 3/8	31	15	12	22	22
		OL7116-06	10	G 1/4	30,5	14,5	12	19	22
		OL7116-07	10	G 1/2	33,5	17,5	14	27	22
		OL7116-08	12	G 3/8	33	17	12	22	24
		OL7116-09	12	G 1/4	32,5	16,5	12	22	24
		OL7116-10	12	G 1/2	33,5	17,5	14	27	24
		OL7116-11	14	G 1/2	37	19	14	27	27
		OL7116-12	14	G 3/8	36,5	18,5	12	24	27
	400	OL7116-13	16	G 1/2	37	18,5	14	27	30
		OL7116-14	16	G 3/8	36,5	18	12	27	30
		OL7116-15	16	G 3/4	39	20,5	16	32	30
		OL7116-16	20	G 3/4	42	20,5	16	32	36
		OL7116-17	20	G 1/2	42	20,5	14	32	36
		OL7116-18	25	G 1	47	23	18	41	46
		OL7116-19	25	G 3/4	47	23	16	41	46
		OL7116-20	30	G 1 1/4	50	23,5	20	50	50
		OL7116-21	30	G 1	50	23,5	18	46	50
	315	OL7116-22	38	G 1 1/2	57	26	22	55	60
		OL7116-23	38	G 1 1/4	57	26	20	55	60

Adattatori DIN2353 / DIN2353 Adaptors

OL7117 Terminale diritto

Male Stud Couplings



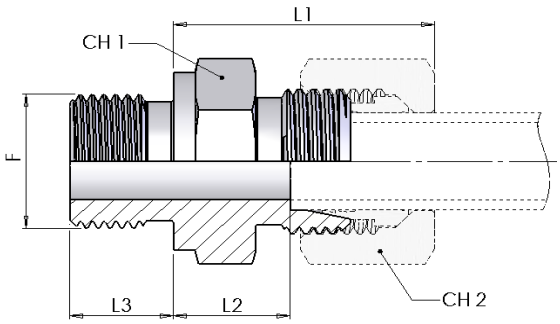

Filettatura / Thread:
Metric (Form B DIN 3852)


W.P.		part number (body only)	Ø tube	thread	Dimensions				
bar			mm	F	L_1	L_2	L_3	CH_1	CH_2
L	315	OL7117-01	6	M 10x1	23	8,5	8	14	14
		OL7117-02	8	M 12x1,5	25	10	12	19	17
		OL7117-03	8	M 18x1,5	26,5	11,5	12	24	17
		OL7117-04	10	M 14x1,5	26	11	12	19	19
		OL7117-05	10	M 16x1,5	27,5	12,5	12	22	19
		OL7117-06	10	M 18x1,5	27,5	12,5	12	24	19
		OL7117-07	10	M 22x1,5	29	14	14	27	19
		OL7117-08	12	M 16x1,5	27	12,5	12	22	22
		OL7117-09	12	M 14x1,5	27	12,5	12	19	22
		OL7117-10	12	M 18x1,5	27	12,5	12	24	22
		OL7117-11	12	M 22x1,5	28,5	14	14	27	22
		OL7117-12	15	M 18x1,5	29	14	14	27	27
		OL7117-13	15	M 16x1,5	28	13	12	24	27
		OL7117-14	15	M 22x1,5	30	15	14	27	27
		OL7117-15	18	M 22x1,5	31	14,5	14	27	32
		OL7117-16	18	M 18x1,5	30,5	14	12	27	32
	160	OL7117-17	22	M 26x1,5	33	16,5	16	32	36
		OL7117-18	22	M 22x1,5	33	16,5	14	32	36
		OL7117-19	28	M 33x2	34	17,5	18	41	41
		OL7117-20	35	M 42x2	39	17,5	20	50	50
		OL7117-21	42	M 48x2	42	19	22	55	60
S	630	OL7117-22	6	M 12x1,5	28	13	12	19	17
		OL7117-23	8	M 14x1,5	30	15	12	19	19
		OL7117-24	10	M 16x1,5	31	15	12	22	22
		OL7117-25	12	M 18x1,5	33	17	12	24	24
		OL7117-26	12	M 22x1,5	33,5	17,5	14	27	24
		OL7117-27	14	M 20x1,5	37	19	14	27	27
	400	OL7117-28	16	M 22x1,5	37	18,5	14	27	30
		OL7117-29	16	M 18x1,5	36,5	18	12	27	30
		OL7117-30	20	M 27x2	42	20,5	16	32	36
		OL7117-31	25	M 33x2	47	23	18	41	46
		OL7117-32	30	M 42x2	50	23,5	20	50	50
	315	OL7117-33	38	M 48x2	57	26	22	55	60

Adattatori DIN2353 / DIN2353 Adaptors

OL7120 Terminale diritto con O-Ring

Male Stud Couplingsrubber seal



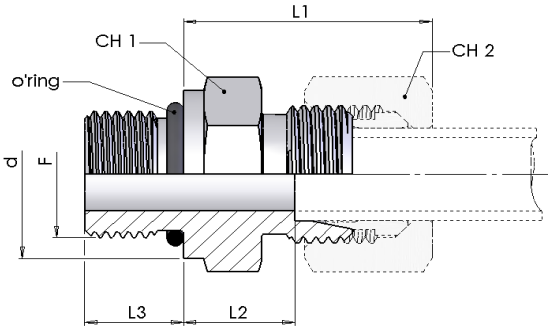

Filettatura / Thread:
UNF/UN (ISO 11926-1)

W.P.		part number (body only)	Ø tube	thread	Dimensions						
bar			mm	F	d	L1	L2	L3	CH1	CH2	O-Ring
L	315	**OL7120-01**	8	7/16-20 UNF	13,8	25	10	9	14	17	8,92x1,83
		OL7120-02	10	7/16-20 UNF	13,8	26	11	9	17	19	8,92x1,83
		OL7120-03	12	9/16-18 UNF	16,8	25,5	11	10	19	22	11,9x1,98
		OL7120-04	12	3/4-16 UNF	21,8	27,5	13	11	22	22	16,36x2,20
		OL7120-05	12	7/8-14 UNF	26,8	29	14,5	12,5	27	22	19,18x2,46
		OL7120-06	15	3/4-16 UNF	21,8	29	14	11	24	27	16,36x2,2
		OL7120-07	15	7/8-14 UNF	22,3	29	14	11	24	27	16,36x2,2
		OL7120-08	18	3/4-16 UNF	21,8	31	14,5	11	27	32	16,36x2,2
		OL7120-09	18	7/8-14 UNF	26,8	31,5	15	12,5	27	32	19,18x2,46
	160	**OL7120-10**	22	7/8-14 UNF	26,8	33,5	17	12,5	32	36	19,18x2,46
		OL7120-11	22	1 1/16-12 UN	31,8	33	16,5	15	32	36	23,47x2,95
		OL7120-12	22	1 5/16-12 UN	40,8	34	17,5	15	41	36	29,74x2,95
		OL7120-13	28	1 1/16-12 UN	31,8	34	17,5	15	41	41	23,47x2,95
		OL7120-14	28	1 5/16-12 UN	40,8	34	17,5	15	41	41	29,74x2,95
		OL7120-15	35	1 5/16-12 UN	40,8	39	17,5	15	46	50	29,74x2,95
		OL7120-16	35	1 5/8-12 UN	49,8	39	17,5	15	50	50	37,46x3
		OL7120-17	42	1 5/8-12 UN	49,8	42	19	15	55	60	37,46x3
S	630	**OL7120-18**	8	7/16-20 UNF	13,8	30	15	9	17	19	8,92x1,83
		OL7120-19	10	9/16-18 UNF	16,8	30,5	14,5	10	19	22	11,9x1,98
		OL7120-20	12	9/16-18 UNF	16,8	30,5	14,5	10	22	24	11,9x1,98
		OL7120-21	12	3/4-16 UNF	21,8	33,5	17,5	11	22	24	16,36x2,20
	400	**OL7120-22**	16	3/4-16 UNF	21,8	34	15,5	11	27	30	16,36x2,20
		OL7120-23	16	7/8-14 UNF	26,8	37,5	19	12,5	27	30	19,18x2,46
		OL7120-24	20	3/4-16 UNF	21,8	42	20,5	11	32	36	16,36x2,20
		OL7120-25	20	7/8-14 UNF	26,8	42,5	21	12,5	32	36	19,18x2,46
		OL7120-26	20	1 1/16-12 UN	31,8	42	20,5	15	32	36	23,47x2,95
		OL7120-27	25	1 1/16-12 UN	31,8	47	23	15	36	46	23,47x2,95
		OL7120-28	25	1 5/16-12 UN	40,8	47	23	15	41	46	29,74x2,95
		OL7120-29	30	1 5/16-12 UN	40,8	50	23,5	15	46	50	29,74x2,95
		OL7120-30	30	1 5/8-12 UN	49,8	50	23,5	15	50	20	37,46x3
	315	**OL7120-31**	38	1 5/8-12 UN	49,8	57	26	15	55	60	37,46x3

* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35°a +100℃ - FPM (Viton): da -25°a +120℃


** - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35°to +100℃ - FP M (Viton): from -25°to +120℃*

Adattatori DIN2353 / DIN2353 Adaptors

OL7125 Terminale diritto con guarnizione piana

Male Stud Couplingsrubber seal



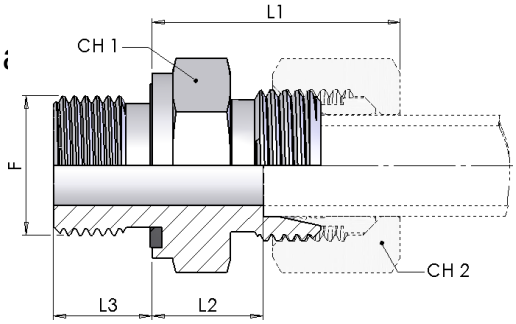


Filettatura / Thread:
BSPP (Form E DIN 3852)

W.P.		part number (body only)	Ø tube	thread	Dimensions				
bar			mm	F	L_1	L_2	L_3	CH_1	CH_2
L	315	OL7125-01	6	G 1/8	23	8,5	8	14	14
		OL7125-02	6	G 1/4	24,5	10	12	19	14
		OL7125-03	6	G 3/8	26	11,5	12	22	14
		OL7125-04	8	G 1/4	25	10	12	19	17
		OL7125-05	8	G 1/8	24,5	9,5	8	14	17
		OL7125-06	8	G 3/8	26,5	11,5	12	22	17
		OL7125-07	8	G 1/2	27	12	14	27	17
		OL7125-08	10	G 1/4	26	11	12	19	19
		OL7125-09	10	G 1/8	25,5	110,5	8	17	19
		OL7125-10	10	G 3/8	27,5	12,5	12	22	19
		OL7125-11	10	G 1/2	28	13	14	27	19
		OL7125-12	12	G 3/8	27	12,5	12	22	22
		OL7125-13	12	G 1/4	26,5	12	12	19	22
		OL7125-14	12	G 1/2	27,5	13	14	27	22
		OL7125-15	15	G 1/2	29	14	14	27	27
		OL7125-16	15	G 3/8	28,5	13,5	12	24	27
		OL7125-17	15	G 3/4	30	15	16	32	27
		OL7125-18	18	G 1/2	31	14,5	14	27	32
		OL7125-19	18	G 3/4	31	14,5	16	32	32
	160	OL7125-20	22	G 3/4	33	16,5	16	32	36
		OL7125-21	22	G 1/2	33	16,5	14	32	36
		OL7125-22	22	G 1	34	17,5	18	41	36
		OL7125-23	28	G 1	34	17,5	18	41	41
		OL7125-24	28	G 3/4	34	17,5	16	41	41
		OL7125-25	35	G 1 1/4	39	17,5	20	50	50
		OL7125-26	35	G 1	39	17,5	18	46	50
		OL7125-27	42	G 1 1/2	42	19	22	55	60
S	630	OL7125-28	6	G 1/4	28	13	12	19	17
		OL7125-29	8	G 1/4	30	15	12	19	19
		OL7125-30	8	G 3/8	30,5	15,5	12	22	19
		OL7125-31	10	G 3/8	31	15	12	22	22
		OL7125-32	10	G 1/4	30,5	14,5	12	19	22
		OL7125-33	10	G 1/2	33,5	17,5	14	27	22
		OL7125-34	12	G 3/8	33	17	12	22	24
		OL7125-35	12	G 1/4	32,5	16,5	12	22	24
		OL7125-36	12	G 1/2	33,5	17,5	14	27	24
		OL7125-37	14	G 1/2	37	19	14	27	27
		OL7125-38	14	G 3/8	36,5	18,5	12	24	27
	400	OL7125-39	16	G 1/2	37	18,5	14	27	30
		OL7125-40	16	G 3/8	36,5	18	12	27	30
		OL7125-41	16	G 3/4	39	20,5	16	32	30
		OL7125-42	20	G 3/4	42	20,5	16	32	36
		OL7125-43	20	G 1/2	42	20,5	14	32	36
		OL7125-44	25	G 1	44	22,5	18	41	46
		OL7125-45	25	G 3/4	47	23	16	41	46
		OL7125-46	30	G 1 1/4	50	23,5	20	50	50
		OL7125-47	30	G 1	502	15,5	18	46	520
	315	OL7125-48	38	G 1 1/2	57	26	22	55	60
		OL7125-49	38	G 1 1/4	57	26	20	55	60

OL7126 Terminale diritto con guarnizione piana

Male Stud Couplings with rubber seal



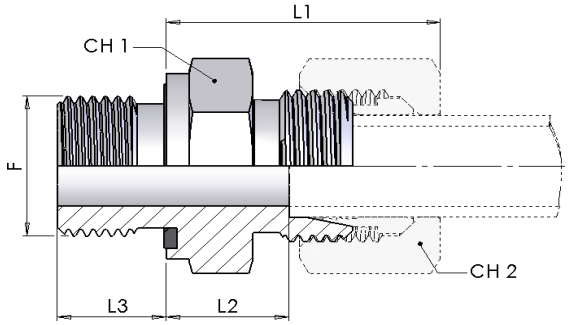


Filettatura / Thread:
Metric (Form E DIN 3852)


W.P.		part number (body only)	Ø tube	thread	Dimensions				
bar			mm	F	L_1	L_2	L_3	CH_1	CH_2
L	315	OL7126-01	6	M 10x1	23	8,5	8	14	14
		OL7126-02	8	M 12x1,5	25	10	12	17	17
		OL7126-03	10	M 14x1,5	26	11	12	19	19
		OL7126-04	10	M 16x1,5	27,5	12,5	12	22	19
		OL7126-05	10	M 18x1,5	27,5	12,5	12	24	19
		OL7126-06	10	M 22x1,5	29	14	14	27	19
		OL7126-07	12	M 16x1,5	27	12,5	12	22	22
		OL7126-08	12	M 14x1,5	27	12,5	12	19	22
		OL7126-09	12	M 18x1,5	27	12,5	12	24	22
		OL7126-10	12	M 22x1,5	28,5	14	14	27	22
		OL7126-11	15	M 18x1,5	2	13,5	12	24	27
		OL7126-12	15	M 16x1,5	28	13	12	24	27
		OL7126-13	15	M 22x1,5	30	15	14	27	27
		OL7126-14	18	M 22x1,5	31	14,5	14	27	32
		OL7126-15	18	M 18x1,5	30,5	14	12	27	32
	160	OL7126-16	22	M 26x1,5	33	16,5	16	32	36
		OL7126-17	22	M 22x1,5	33	16,5	14	32	36
		OL7126-18	28	M 33x2	34	17,5	18	41	41
		OL7126-19	35	M 42x2	39	17,5	20	50	50
		OL7126-20	42	M 48x2	42	19	22	55	60
S	630	OL7126-21	6	M 12x1,5	28	13	12	17	17
		OL7126-22	8	M 14x1,5	30	15	12	19	19
		OL7126-23	10	M 16x1,5	31	15	12	22	22
		OL7126-24	12	M 18x1,5	33	17	12	24	24
		OL7126-25	12	M 22x1,5	33,5	17,5	14	27	24
		OL7126-26	14	M 20x1,5	37	19	14	27	27
	400	OL7126-27	16	M 22x1,5	37	18,5	14	27	30
		OL7126-28	16	M 18x1,5	36,5	18	12	27	30
		OL7126-29	20	M 27x2	42	20,5	16	32	36
		OL7126-30	25	M 33x2	47	23	18	41	46
		OL7126-31	30	M 42x2	50	23,5	20	50	50
	315	OL7126-32	38	M 48x2	57	26	22	55	60

Adattatori DIN2353 / DIN2353 Adaptors

OL7130 Terminale diritto CONICO

Male Stud Couplings



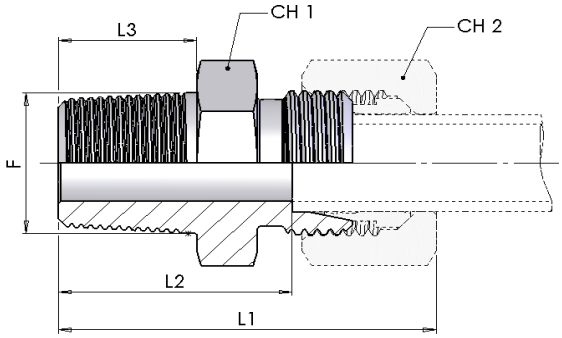

Filettatura / Thread:
BSPT (Form C DIN 3852)


W.P.		part number (body only)	Ø tube	thread	Dimensions				
bar			mm	F	L_1	L_2	L_3	CH_1	CH_2
LL	100	OL7130-01	4	R 1/8 K	26,5	16	8	12	10
		OL7130-02	6	R 1/8 K	26,5	14,5	8	12	12
		OL7130-03	8	R 1/8 K	28,5	16,5	8	12	14
		OL7130-04	8	R 1/4 K	32	20,5	12	14	14
		OL7130-05	10	R 1/4 K	32	20,5	12	14	17
		OL7130-06	12	R 1/4 K	32	20	12	17	19
		OL7130-07	12	R 3/8 K	32	20	12	17	19
L	315	OL7130-08	6	R 1/8 K	30	15	8	12	14
		OL7130-09	6	R 1/4 K	34,5	20	12	14	14
		OL7130-10	8	R 1/4 K	35	20	12	17	17
		OL7130-11	10	R 1/4 K	36	21	12	17	19
		OL7130-12	12	R 3/8 K	36,5	22	12	19	22
		OL7130-13	12	R 1/4 K	36,5	22	12	19	22
		OL7130-14	12	R 1/2 K	38,5	24	14	22	22
		OL7130-15	15	R 1/2 K	40	25	14	24	27
		OL7130-16	15	R 3/8 K	38	23	12	24	27
		OL7130-17	18	R 1/2 K	42	25,5	14	27	32
	160	OL7130-18	22	R 3/4 K	46	29,5	16	32	36
		OL7130-19	28	R 1 K	49	32,5	18	41	41
		OL7130-20	35	R 1 1/4 K	56	34,5	20	46	50
		OL7130-21	42	R 1 1/2 K	61	38	22	55	60
S	630	OL7130-22	6	R 1/4 K	38	23	12	17	17
		OL7130-23	8	R 1/4 K	40	25	12	17	19
		OL7130-24	10	R 3/8 K	40,5	24,5	12	19	22
		OL7130-25	12	R 3/8 K	42,5	26,5	12	22	24
		OL7130-26	14	R 1/2 K	48	30	14	24	27
	400	OL7130-27	16	R 1/2 K	48	29,5	14	27	30
		OL7130-28	20	R 3/4 K	55	33,5	16	32	36
		OL7130-29	25	R 1 K	62	38	18	41	46
		OL7130-30	30	R 1 1/4 K	67	40,5	20	46	50
	315	OL7130-31	38	R 1 1/2 K	76	45	22	55	60


Adattatori DIN2353 / DIN2353 Adaptors

OL7131
OL7132

Terminale diritto

Male Stud Couplings



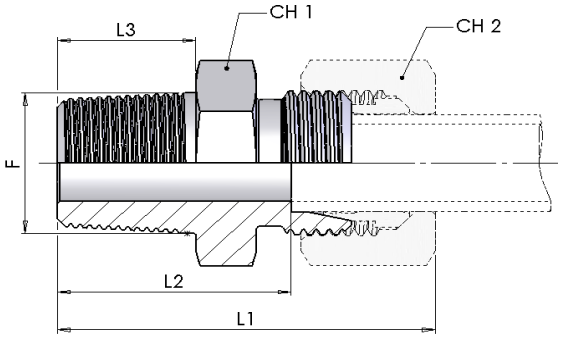

Filettatura / Thread:
NPT (ANSI/ASME B1,20,1-1983)


W.P.		part number (body only)	Ø tube	thread	Dimensions				
bar			mm	F	L_1	L_2	L_3	CH_1	CH_2
LL	100	**OL7131-01**	4	1/8 NPT	28	18	10	12	10
		OL7131-02	6	1/8 NPT	28	16,5	10	12	12
		OL7131-03	8	1/8 NPT	30	18,5	10	12	14
L	315	**OL7131-04**	6	1/8 NPT	31,5	17	10	12	14
		OL7131-05	8	1/4 NPT	38	23	15	17	17
		OL7131-06	10	1/4 NPT	39	24	15	17	19
		OL7131-07	10	3/8 NPT	40	25	15	19	19
		OL7131-08	12	3/8 NPT	39,5	25	15	19	22
		OL7131-09	12	1/4 NPT	39,5	25	15	19	22
		OL7131-10	12	1/2 NPT	44,5	30	19,5	22	22
		OL7131-11	15	1/2 NPT	46	31	19,5	24	27
		OL7131-12	18	1/2 NPT	48	31,5	19,5	27	32
	160	**OL7131-13**	22	3/4 NPT	50	33,5	20	32	36
		OL7131-14	28	1 NPT	56	39,5	25	41	41
		OL7131-15	35	1 1/4 NPT	62	40,5	25,5	46	50
		OL7131-16	42	1 1/2 NPT	65	42	26	55	60
	315	**OL7131-17**	6	1/4 NPT	37,5	23	15	14	14
S	630	**OL7131-18**	6	1/4 NPT	41	26	15	17	17
		OL7131-19	8	1/4 NPT	43	28	15	17	19
		OL7131-20	10	3/8 NPT	43,5	27,5	15	19	22
		OL7131-21	10	1/4 NPT	44	25,5	13	19	22
		OL7131-22	12	3/8 NPT	45,5	29,5	15	22	24
		OL7131-23	12	1/4 NPT	46	27,5	13	22	24
		OL7131-24	12	1/2 NPT	50,5	34,5	19,5	22	24
		OL7131-25	14	1/2 NPT	54	36	19,5	24	27
	400	**OL7131-26**	16	1/2 NPT	54	35,5	19,5	27	30
		OL7131-27	20	3/4 NPT	59	37,5	20	32	36
		OL7131-28	25	1 NPT	69	45	25	41	46
		OL7131-29	30	1 1/4 NPT	73	46,5	25,5	46	50
	315	**OL7131-30**	38	1 1/2 NPT	80	49	26	55	60


Filettatura / Thread:
Metric Taper (Form C DIN 3852)

W.P.		part number (body only)	Ø tube	thread	Dimensions				
bar			mm	M	L_1	L_2	L_3	CH_1	CH_2
LL	100	**OL7132-01**	4	M 8x1 K	26,5	16	8	12	10
		OL7132-02	6	M 10x1 K	26,5	14,5	8	12	12
		OL7132-03	8	M 10x1 K	28,5	16,5	8	12	14

OL7135 GOMITO DI ESTREMITA'

Stud Elbows



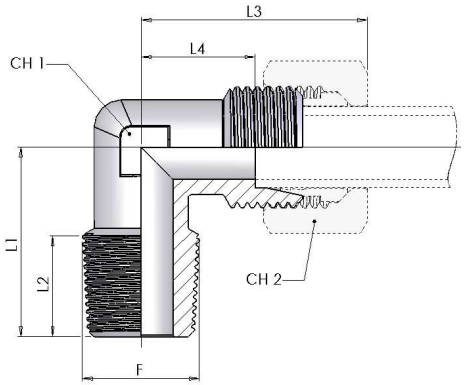

Filettatura / Thread:
BSPT (Form C DIN 3852)


W.P.		part number (body only)	Ø tube	thread	Dimensions					
bar			mm	F	L_1	L_2	L_3	L_4	CH_1	CH_2
LL	100	**OL7135-01**	4	R 1/8 K	17	8	21	11	9	10
		OL7135-02	6	R 1/8 K	17	8	21	9,5	9	12
		OL7135-03	8	R 1/8 K	20	8	23	11,5	12	14
		OL7135-04	10	R 1/4 K	25	12	27	15	14	17
		OL7135-05	12	R 1/4 K	23	12	25	13	17	19
L	315	**OL7135-06**	6	R 1/8 K	20	8	27	12	12	14
		OL7135-07	8	R 1/4 K	26	12	29	14	12	17
		OL7135-08	8	R 3/8 K	28	12	31	16	17	17
		OL7135-09	10	R 1/4 K	27	12	30	15	14	19
		OL7135-10	10	R 3/8 K	28	12	32	17	17	19
		OL7135-11	12	R 3/8 K	28	12	32	17	17	22
		OL7135-12	12	R 1/4 K	28	12	32	17	17	22
		OL7135-13	12	R 1/2 K	34	14	34	20	19	22
		OL7135-14	15	R 1/2 K	34	14	36	21	19	27
		OL7135-15	18	R 1/2 K	36	14	40	23,5	24	32
	160	**OL7135-16**	22	R 3/4 K	42	16	44	27,5	27	36
		OL7135-17	28	R 1 K	48	18	47	30,5	36	41
		OL7135-18	35	R 1 1/4 K	54	20	56	34,5	41	50
		OL7135-19	42	R 1 1/2 K	61	22	63	40	50	60
S	630	**OL7135-20**	6	R 1/4 K	26	12	31	16	12	17
		OL7135-21	8	R 1/4 K	27	12	32	17	14	19
		OL7135-22	10	R 3/8 K	28	12	34	17,5	17	22
		OL7135-23	12	R 3/8 K	28	12	38	21,5	17	24
		OL7135-24	14	R 1/2 K	32	14	40	22	19	27
	400	**OL7135-25**	16	R 1/2 K	32	14	43	24,5	24	30
		OL7135-26	20	R 3/4 K	42	16	48	26,5	27	36
		OL7135-27	25	R 1 K	48	18	54	30	36	46
		OL7135-28	30	R 1 1/4 K	54	20	62	35,5	41	50
	315	**OL7135-29**	38	R 1 1/2 K	61	22	72	41	50	60


Adattatori DIN2353 / DIN2353 Adaptors

OL7136
OL7137

GOMITO DI ESTREMITA'

Stud Elbows



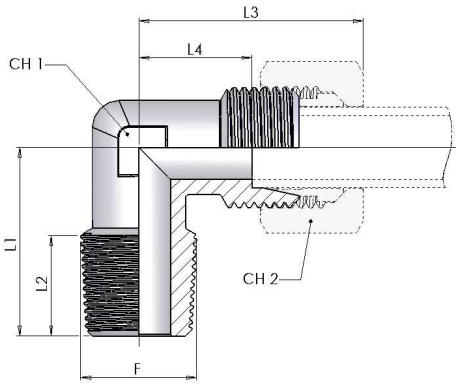

Filettatura / Thread:
NPT (ANSI/ASME B1,20,1-1983)

W.P.		part number (body only)	Ø tube	thread	Dimensions					
bar			mm	F	L1	L2	L3	L4	CH1	CH2
LL	100	OL7136-01	4	1/8 NPT	17	8	21	11	9	10
		OL7136-02	6	1/8 NPT	17	8	21	9,5	9	12
		OL7136-03	8	1/8 NPT	20	8	23	11,5	12	14
L	315	OL7136-04	6	1/8 NPT	20	10	27	12	12	14
		OL7136-05	8	1/4 NPT	26	15	29	14	12	17
		OL7136-06	10	1/4 NPT	27	15	30	15	14	19
		OL7136-07	12	3/8 NPT	28	15	32	17	17	22
		OL7136-08	12	1/4 NPT	28	15	32	17	17	22
		OL7136-09	12	1/2 NPT	34	19,5	35	20	19	22
		OL7136-10	15	1/2 NPT	34	19,5	36	21	19	27
		OL7136-11	18	1/2 NPT	36	19,5	40	23,5	24	32
	160	OL7136-12	22	3/4 NPT	42	20	44	27,5	27	36
		OL7136-13	28	1 NPT	48	25	47	305	36	41
		OL7136-14	35	1 1/4 NPT	57	25,5	56	34,5	41	50
		OL7136-15	42	1 1/2 NPT	61	26	63	40	50	60
S	630	OL7136-16	6	1/4 NPT	26	15	31	16	12	17
		OL7136-17	8	1/4 NPT	27	15	32	17	14	19
		OL7136-18	10	3/8 NPT	28	15	34	17,5	17	22
		OL7136-19	12	3/8 NPT	28	15	38	21,5	17	24
		OL7136-20	14	1/2 NPT	34	19,5	40	22	19	27
	400	OL7136-21	16	1/2 NPT	36	19,5	43	24,5	24	30
		OL7136-22	20	3/4 NPT	42	20	48	26,5	27	36
		OL7136-23	25	1 NPT	48	25	54	30	36	46
		OL7136-24	30	1 1/4 NPT	54	25,5	62	35,5	41	50
	315	OL7136-25	38	1 1/2 NPT	61	26	72	41	50	60


Filettatura / Thread:
Metric Taper (Form C DIN 3852)


W.P.		part number (body only)	Ø tube	thread	Dimensions					
bar			mm	F	L1	L2	L3	L4	CH1	CH2
LL	100	OL7137-01	4	M 8x1 K	17	8	21	11	9	10
		OL7137-02	6	M 10x1 K	17	8	21	9,5	9	12
		OL7137-03	8	M 10x1 K	20	8	23	11,5	12	14
L	315	OL7137-04	6	M 10x1 K	20	8	27	12	12	14
		OL7137-05	8	M 12x1,5 K	26	12	29	14	12	17
		OL7137-06	10	M 14x1,5 K	27	12	30	15	14	19
		OL7137-07	12	M 16x1,5 K	28	12	32	17	17	22
		OL7137-08	15	M 18x1,5 K	32	12	36	21	19	27
		OL7137-09	18	M 22x1,5 K	36	14	40	23,5	24	32
S	630	OL7137-10	6	M 12x1,5 K	26	12	31	16	12	17
		OL7137-11	8	M 14x1,5 K	27	12	32	17	14	19
		OL7137-12	10	M 16x1,5 K	28	12	34	17,5	17	22
		OL7137-13	12	M 18x1,5 K	28	12	38	21,5	17	24
		OL7137-14	14	M 20x1,5 K	32	14	40	22	19	27
	400	OL7137-15	16	M 22x1,5 K	32	14	43	24,5	24	30

OL7140
OL7141

GOMITO DI ESTREMITA'

Stud Elbows



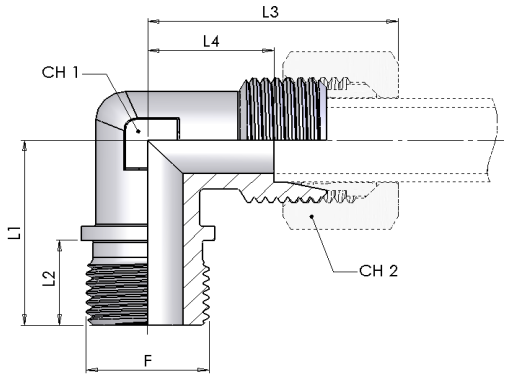

Filettatura / Thread:
BSPP (Form B DIN 3852)


W.P.		part number (body only)	Ø tube	thread	Dimensions					
bar			mm	F	L_1	L_2	L_3	L_4	CH_1	CH_2
L	160	**OL7140-01**	22	G 3/4	43,5	15	44	27,5	27	36
		OL7140-02	28	G 1	49	17	47	30,5	36	41
		OL7140-03	35	G 1 1/4	57	19	56	34,5	41	50
		OL7140-04	42	G 1 1/2	64	20	63	40	50	60
S	400	**OL7140-05**	20	G 3/4	43,5	15	48	26,5	27	36
		OL7140-06	25	G 1	49	17	54	30	36	46
		OL7140-07	30	G 1 1/4	57	19	62	35,5	41	50
	315	**OL7140-08**	38	G 1 1/2	64	20	72	41	50	60


Filettatura / Thread:
Metric (Form B DIN 3852)

W.P.		part number (body only)	Ø tube	thread	Dimensions					
bar			mm	F	L_1	L_2	L_3	L_4	CH_1	CH_2
L	160	**OL7141-01**	22	M 26x1,5	43,5	15	44	27,5	27	36
		OL7141-02	28	M 33x2	49	17	47	30,5	36	41
		OL7141-03	35	M 42x2	57	19	56	34,5	41	50
		OL7141-04	42	M 48x2	64	20	63	40	50	60
S	400	**OL7141-05**	20	M 27x2	43,5	15	48	26,5	27	36
		OL7141-06	25	M 33x2	49	17	54	30	36	46
		OL7141-07	30	M 42x2	57	19	62	35,5	41	50
	315	**OL7141-08**	38	M 48x2	64	20	72	41	50	60

OL7145 Terminale a gomito con maschio BSPP orientabile

Adjustable male stud elbows with flare-washer thread: BSP parallel



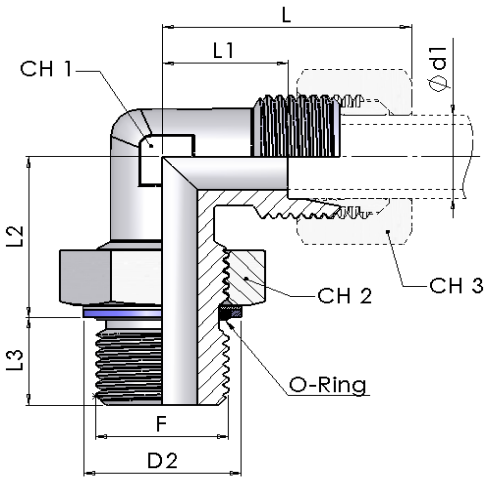

Filettatura / Thread:
BSPP (ISO 1179-3)


W.P.		part number (body only)	tube Ød1	thread	Dimensions								O-Ring*
bar			mm	F	D2	L	L1	L2	L3	CH1	CH2	CH3	mm
L	200	**OL7145-01**	6	G 1/8	14,8	27	12	21	7	12	14	14	8x1,88
		OL7145-02	8	G 1/4	19,8	29	14	25	9	12	19	17	10,77x2,62
		OL7145-03	10	G 1/4	19,8	30	15	25	9	14	19	19	10,77x2,62
		OL7145-04	12	G 3/8	22,8	32	17	29	9	17	22	22	13,94x2,62
		OL7145-05	15	G 1/2	27,8	36	21	31	13	19	30	27	17x3,00
		OL7145-06	18	G 1/2	27,8	40	23,5	36	13	24	30	32	17x3,00
	160	**OL7145-07**	22	G 3/4	32,8	44	27,5	37	13	27	36	36	23,5x3,00
		OL7145-08	28	G 1	40,8	47	30,5	44	15	36	41	41	29,2x3,00
		OL7145-09	35	G 1 1/4	50,8	56	34,5	52	15	41	50	50	37,69x3,53
		OL7145-10	42	G 1 1/2	55,8	63	40	52	15	50	55	60	44,04x3,53
S	200	**OL7145-11**	6	G 1/4	19,8	31	16	25	9	12	19	17	10,77x2,62
		OL7145-12	8	G 1/4	19,8	32	17	27	9	14	19	19	10,77x2,62
		OL7145-13	10	G 3/8	22,8	34	17,5	29	9	17	22	22	13,94x2,62
		OL7145-14	12	G 3/8	22,8	38	21,5	29	9	17	22	24	13,94x2,62
		OL7145-15	16	G 1/2	27,8	43	24,5	36	13	24	30	30	17x3,00
		OL7145-16	20	G 3/4	32,8	48	26,5	39	13	27	36	36	23,5x3,00
		OL7145-17	25	G 1	40,8	54	30	44	15	36	41	46	29,2x3,00
	160	**OL7145-18**	30	G 1 1/4	50,8	62	35,5	52	15	41	50	50	37,69x3,53
		OL7145-19	38	G 1 1/2	55,8	72	41	54	15	50	55	60	44,04x3,53


* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35°a +100℃ - FPM (Viton): da -25°a +120℃

** - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35°to +100℃ - FP M (Viton): from -25°to +120℃*

OL7146 Terminale a gomito con maschio Metrico orientabile

Adjustable male stud elbows with flare-wascher thread: Metric parallel



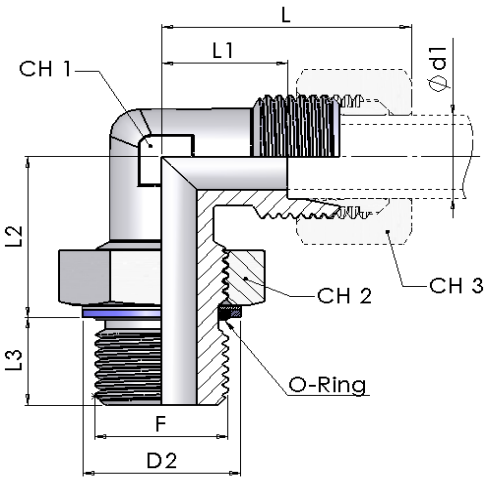

Filettatura / Thread:
Metric parallel

W.P.		part number (body only)	tube Ød1	thread	Dimensions								O-Ring*
bar			mm	F	D2	L	L1	L2	L3	CH1	CH2	CH3	mm
L	315	**OL7146-01**	6	M10x1	14,8	27	12	21,5	7	12	14	14	8x1,8
		OL7146-02	8	M12x1,5	17,8	29	14	23,5	9,5	12	17	17	9,3x2,2
		OL7146-03	10	M14x1,5	19,8	30	15	26,5	9,5	14	19	19	11,3x2,2
	250	**OL7146-04**	12	M16x1,5	21,8	32	17	27,5	10	17	22	22	13,3x2,2
		OL7146-05	15	M18x1,5	23,8	36	21	29	10,5	19	24	27	15,54x2,62
		OL7146-06	18	M22x1,5	27,8	40	23,5	35	11	24	27	32	19x2,65
	160	**OL7146-07**	22	M27x2	32,8	44	27,5	38,5	13,5	27	32	36	23,47x2,95
		OL7146-08	28	M33x2	39,8	47	30,5	41,5	13,5	36	41	41	29,4x3,1
		OL7146-09	35	M42x2	49,8	56	34,5	50,5	13,5	41	50	50	38x3,5
		OL7146-10	42	M48x2	55,8	63	40	51,5	15	50	55	60	40,04x3,53
S	315	**OL7146-11**	6	M12x1,5	17,8	31	16	23,5	9,5	12	17	17	9,3x2,2
		OL7146-12	8	M14x1,5	19,8	32	17	26,5	9,5	14	19	19	11,3x2,2
		OL7146-13	10	M16x1,5	21,8	34	17,5	27,5	11	17	22	22	13,3x2,2
		OL7146-14	12	M18x1,5	23,8	38	21,5	30	12	17	24	24	15,54x2,62
	250	**OL7146-15**	16	M22x1,5	27,8	43	24,5	37	13	24	27	30	19x2,65
		OL7146-16	20	M27x2	32,8	48	26,5	41,5	16	27	32	36	23,47x2,95
	160	**OL7146-17**	25	M33x2	39,8	54	30	45,5	16	36	41	46	29,4x3,1
		OL7146-18	30	M42x2	49,8	62	35,5	53,5	16,5	41	50	50	38x3,5
		OL7146-19	38	M48x2	55,8	72	41	56,5	19	50	55	60	44,04x3,53


* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35°a +100℃ - FPM (Viton): da -25°a +120℃

** - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35°to +100℃ - FPM (V iton): from -25°to +120℃*

OL7150 Terminale a gomito con maschio UNF

Adjustable male stud elbows with flare-wascher thread: UNF



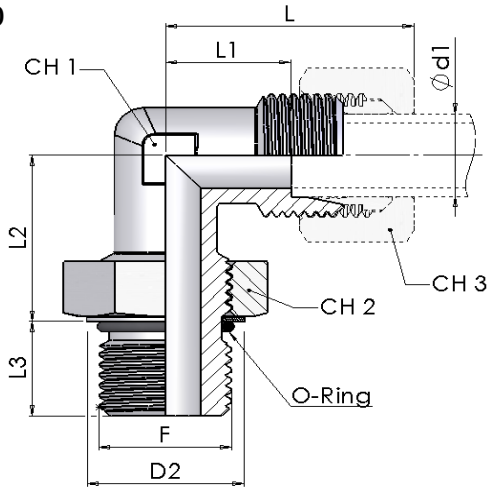

Filettatura / Thread:
UNF/UN (ISO 11926-1)


W.P.		part number (body only)	tube Ød1	thread	Dimensions								O-Ring*
bar			mm	F	D2	L	L1	L2	L3	CH1	CH2	CH3	mm
L	315	**OL7150-01**	6	7/16-20	16,5	27	12	20	10	12	14	14	9,17x1,83
		OL7150-02	8	7/16-20	16,5	29	14	20	10	12	14	17	9,17x1,83
	250	**OL7150-03**	10	9/16-18	20,2	30	15	25	11	14	17	19	11,89x1,98
		OL7150-04	12	9/16-18	20,2	32	17	25	11	17	17	22	11,89x1,98
		OL7150-05	12	3/4-16	25,7	32	17	27	13	17	22	22	16,36x2,21
		OL7150-06	15	3/4-16	25,7	36	21	27	13	19	22	27	16,36x2,21
	200	**OL7150-07**	15	7/8-14	29,3	36	21	33	15	24	27	27	19,18x2,46
		OL7150-08	18	7/8-14	29,3	40	23,5	33	15	24	27	32	19,18x2,46
		OL7150-09	18	1.1/16-12	36,7	40	23,5	36	17	27	32	32	23,47x2,95
	160	**OL7150-10**	22	1.1/16-12	36,7	44	27,5	36	17	27	32	36	23,47x2,95
		OL7150-11	28	1.5/16-12	44,0	47	30,5	42	17	36	41	41	29,74x2,95
	125	**OL7150-12**	35	1.5/8-12	55,0	56	34,5	48	17	41	50	50	37,47x3,00
		OL7150-13	42	1.7/8-12	62,3	63	40	49	17	50	55	60	43,69x3,00
S	400	**OL7150-14**	6	7/16-20	16,5	31	16	22	11	12	14	17	9,17x1,83
		OL7150-15	8	9/16-18	20,2	32	17	25	12	14	17	19	11,89x1,98
		OL7150-16	10	9/16-18	20,2	34	17,5	26	12	17	17	22	11,89x1,98
		OL7150-17	12	3/4-16	25,7	38	21,5	30	14	17	22	24	16,36x2,21
		OL7150-18	16	7/8-14	29,3	43	24,5	35	16	24	27	30	19,18x2,46
		OL7150-19	20	1.1/16-12	36,7	48	26,5	39	18,5	27	32	36	23,47x2,95
	315	**OL7150-20**	25	1.5/16-12	44,0	54	30	44	18,5	36	41	46	29,74x2,95
	250	**OL7150-21**	30	1.5/8-12	55,0	62	35,5	51	18,5	41	50	50	37,47x3,00
	200	**OL7150-22**	38	1.7/8-12	62,3	72	41	54	18,5	50	55	60	43,69x3,00


* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35°a +100℃ - FPM (Viton): da -25°a +120℃

** - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35°to +100℃ - FPM (V iton): from -25°to +120℃*

OL7155 Terminale a gomito con maschio Metrico orientabile

Adjustable male stud elbows with flare-washer thread: Metric parallel



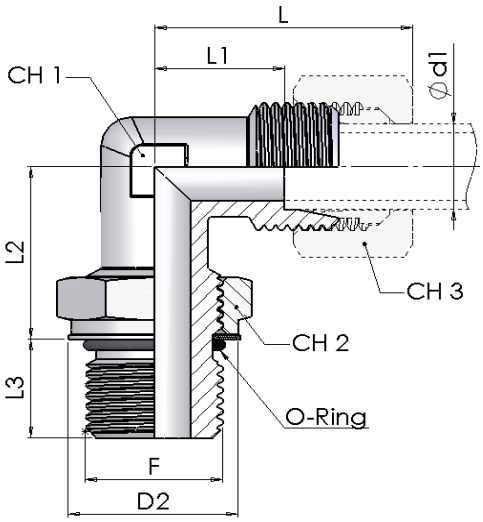

Filettatura / Thread:
Metric (DIN ISO 6149-1)

W.P.		part number (body only)	tube Ød1	thread	Dimensions								O-Ring*
bar			mm	F	D2	L	L1	L2	L3	CH1	CH2	CH3	mm
L	315	**OL7155-01**	6	M10x1	14,5	27	12	21,5	8,5	12	14	14	8,1x1,6
		OL7155-02	8	M12x1,5	17,5	29	14	23,5	11	12	17	17	9,3x2,2
		OL7155-03	10	M14x1,5	19,5	30	15	26,5	11	14	19	19	11,3x2,2
	250	**OL7155-04**	12	M16x1,5	22,5	32	17	27,5	11,5	17	22	22	13,3x2,2
		OL7155-05	15	M18x1,5	24,5	36	21	29	12,5	19	24	27	15,3x2,2
		OL7155-06	18	M22x1,5	27,5	40	23,5	35	13	24	27	32	19,3x2,2
	160	**OL7155-07**	22	M27x2	32,5	44	27,5	38,5	16	27	32	36	23,6x2,9
		OL7155-08	28	M33x2	41,5	47	30,5	41,5	16	36	41	41	29,6x2,9
		OL7155-09	35	M42x2	50,5	56	34,5	50,5	16	41	50	50	38,6x2,9
		OL7155-10	42	M48x2	55,5	63	40	51,5	17,5	50	55	60	44,6x2,9
S	400	**OL7155-11**	6	M12x1,5	17,5	31	16	23,5	11	12	17	17	9,3x2,2
		OL7155-12	8	M14x1,5	19,5	32	17	26,5	11	14	19	19	11,3x2,2
		OL7155-13	10	M16x1,5	22,5	34	17,5	27,5	12,5	17	22	22	13,3x2,2
		OL7155-14	12	M18x1,5	24,5	38	21,5	30	14	17	24	24	15,3x2,2
		OL7155-15	16	M22x1,5	27,5	43	24,5	37	15	24	27	30	19,3x2,2
		OL7155-16	20	M27x2	32,5	48	26,5	41,5	18,5	27	32	36	23,6x2,9
	315	**OL7155-17**	25	M33x2	41,5	54	30	45,5	18,5	36	41	46	29,6x2,9
	250	**OL7155-18**	30	M42x2	50,5	62	35,5	53,5	19	41	50	50	38,6x2,9
	200	**OL7155-19**	38	M48x2	55,5	72	41	56,5	21,5	50	55	60	44,6x2,9

* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35°a +100℃ - FPM (Viton): da -25°a +120℃


** - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35°to +100℃ - FPM (V iton): from -25°to +120℃*

OL7160
OL7161

T DI ESTR. CENTRALE

Stud Branch Tees



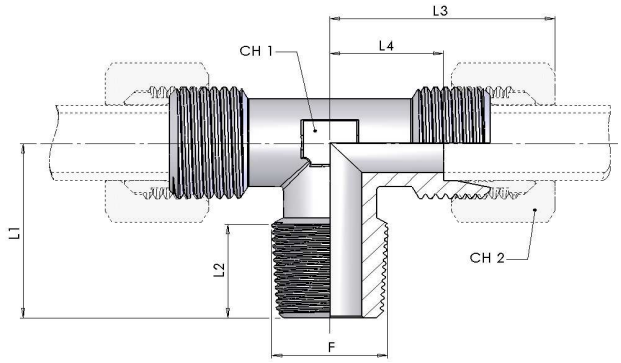

Filettatura / Thread:
BSPT (Form C DIN 3852)

W.P.		part number (body only)	Ø tube	thread	Dimensions					
bar			mm	F	L_1	L_2	L_3	L_4	CH_1	CH_2
LL	100	OL7160-01	4	R 1/8 K	17	8	21	11	9	10
		OL7160-02	6	R 1/8 K	17	8	21	9,5	9	12
		OL7160-03	8	R 1/8 K	20	8	23	11,5	12	14
L	315	OL7160-04	6	R 1/8 K	20	8	27	12	12	14
		OL7160-05	8	R 1/4 K	26	12	29	14	12	17
		OL7160-06	10	R 1/4 K	27	12	30	15	14	19
		OL7160-07	12	R 3/8 K	28	12	32	17	17	22
		OL7160-08	15	R 1/2 K	34	14	36	21	19	27
		OL7160-09	18	R 1/2 K	36	14	40	23,5	24	32
	160	OL7160-10	22	R 3/4 K	42	16	44	27,5	27	36
		OL7160-11	28	R 1 K	48	18	47	30,5	36	41
		OL7160-12	35	R 1 1/4 K	54	20	56	34,5	41	50
		OL7160-13	42	R 1 1/2 K	61	22	63	40	50	60
S	630	OL7160-14	6	R 1/4 K	26	12	31	16	12	17
		OL7160-15	8	R 1/4 K	27	12	32	17	14	19
		OL7160-16	10	R 3/8 K	28	12	34	17,5	17	22
		OL7160-17	12	R 3/8 K	28	12	38	21,5	17	24
		OL7160-18	14	R 1/2 K	32	14	40	22	19	27
	400	OL7160-19	16	R 1/2 K	32	14	43	24,5	24	30
		OL7160-20	20	R 3/4 K	42	16	48	26,5	27	36
		OL7160-21	25	R 1 K	48	18	54	30	36	46
		OL7160-22	30	R 1 1/4 K	54	20	62	35,5	41	50
	315	OL7160-23	38	R 1 1/2 K	61	22	72	41	50	60


Filettatura / Thread:
Metric Taper (Form C DIN 3852)

W.P.		part number (body only)	Ø tube	thread	Dimensions					
bar			mm	F	L_1	L_2	L_3	L_4	CH_1	CH_2
LL	100	OL7161-01	4	M 8x1 K	17	8	21	11	9	10
		OL7161-02	6	M 10x1 K	17	8	21	9,5	9	12
		OL7161-03	8	M 10x1 K	20	8	23	11,5	12	14
L	315	OL7161-04	6	M 10x1 K	20	8	27	12	12	14
		OL7161-05	8	M 12x1,5 K	26	12	29	14	12	17
		OL7161-06	10	M 14x1,5 K	27	12	30	15	14	19
		OL7161-07	12	M 16x1,5 K	28	12	32	17	17	22
		OL7161-08	15	M 18x1,5 K	32	12	36	21	19	27
		OL7161-09	18	M 22x1,5 K	36	14	40	23,5	24	32
S	630	OL7161-10	6	M 12x1,5 K	26	12	31	16	12	17
		OL7161-11	8	M 14x1,5 K	27	12	32	17	14	19
		OL7161-12	10	M 16x1,5 K	28	12	34	17,5	17	22
		OL7161-13	12	M 18x1,5 K	28	12	38	21,5	17	24
	400	OL7161-14	14	M 20x1,5 K	32	14	40	22	19	27
		OL7161-15	16	M 22x1,5 K	32	14	43	24,5	24	30

OL7162 T DI ESTR. CENTRALE

Stud Branch Tees



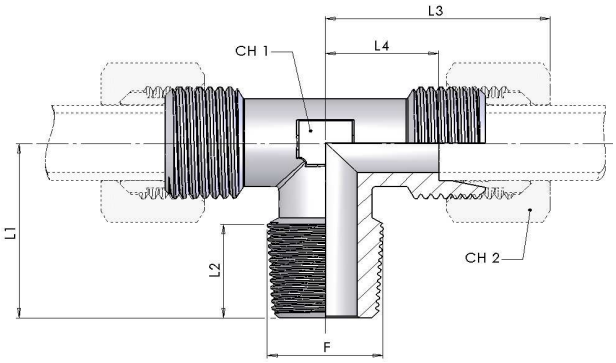

Filettatura / Thread:
NPT (ANSI/ASME B1,20,1-1983)


W.P.		part number (body only)	Ø tube	thread	Dimensions					
bar			mm	F	L_1	L_2	L_3	L_4	CH_1	CH_2
LL	100	**OL7162-01**	4	1/8 NPT	17	8	21	11	9	10
		OL7162-02	6	1/8 NPT	17	8	21	9,5	9	12
		OL7162-03	8	1/8 NPT	20	8	23	11,5	12	14
L	315	**OL7162-04**	6	1/8 NPT	20	10	27	12	12	14
		OL7162-05	8	1/4 NPT	26	15	29	14	12	17
		OL7162-06	10	1/4 NPT	27	15	30	15	14	19
		OL7162-07	12	3/8 NPT	28	15	32	17	17	22
		OL7162-08	15	1/2 NPT	34	19,5	36	21	19	27
		OL7162-09	18	1/2 NPT	36	19,5	40	23,5	24	32
	160	**OL7162-10**	22	3/4 NPT	42	20	44	27,5	27	36
		OL7162-11	28	1 NPT	48	25	47	30,5	36	41
		OL7162-12	35	1 1/4 NPT	57	25,5	56	34,5	41	50
		OL7162-13	42	1 1/2 NPT	61	26	63	40	50	60
S	630	**OL7162-14**	6	1/4 NPT	26	15	31	16	12	17
		OL7162-15	8	1/4 NPT	27	15	32	17	14	19
		OL7162-16	10	3/8 NPT	28	15	34	17,5	17	22
		OL7162-17	12	3/8 NPT	28	15	38	21,5	17	24
		OL7162-18	14	1/2 NPT	34	19,5	40	22	19	27
	400	**OL7162-19**	16	1/2 NPT	36	19,5	43	24,5	24	30
		OL7162-20	20	3/4 NPT	42	20	48	26,5	27	36
		OL7162-21	25	1 NPT	48	25	54	630	36	46
		OL7162-22	30	1 1/4 NPT	57	25,5	62	35,5	41	50
	315	**OL7162-23**	38	1 1/2 NPT	61	26	72	41	50	60


OL7165

OL7166

T DI ESTR. CENTRALE

Stud Branch Tees



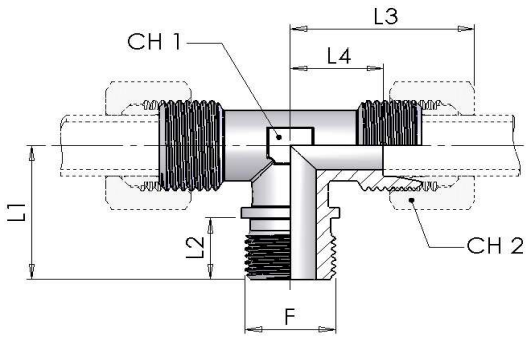

Filettatura / Thread:
BSPP (Form B DIN 3852)


W.P.		part number (body only)	Ø tube	thread	Dimensions					
bar			mm	F	L_1	L_2	L_3	L_4	CH_1	CH_2
L	160	**OL7165-01**	22	G 3/4	43,5	15	44	27,5	27	36
		OL7165-02	28	G 1	49	17	47	30,5	36	41
		OL7165-03	35	G 1 1/4	57	19	56	34,5	41	50
		OL7165-04	42	G 1 1/2	64	20	63	40	50	60
S	400	**OL7165-05**	20	G 3/4	43,5	15	48	26,5	27	36
		OL7165-06	25	G 1	49	17	54	30	36	46
		OL7165-07	30	G 1 1/4	57	19	62	35,5	41	50
	315	**OL7165-08**	38	G 1 1/2	64	20	72	441	50	60


Filettatura / Thread:
Metric (Form B DIN 3852)

W.P.		part number (body only)	Ø tube	thread	Dimensions					
bar			mm	F	L_1	L_2	L_3	L_4	CH_1	CH_2
L	160	**OL7166-01**	22	M 26x1,5	43,5	15	44	27,5	27	36
		OL7166-02	28	M 33x2	49	17	47	30,5	36	41
		OL7166-03	35	M 42x2	57	19	56	34,5	41	50
		OL7166-04	42	M 48x2	64	20	63	40	50	60
S	400	**OL7166-05**	20	M 27x2	43,5	15	48	26,5	27	36
		OL7166-06	25	M 33x2	49	17	54	30	36	46
		OL7166-07	30	M 42x2	57	19	62	35,5	41	50
	315	**OL7166-08**	38	M 48x2	64	20	72	441	50	60

OL7170 Terminale a T con Maschio orient. BSPP centrale

Adjustable male stud branch tees with flare-wascher thread: BSP parallel



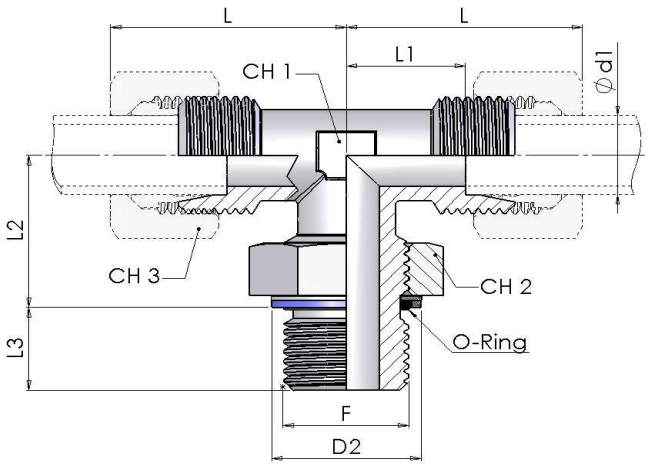

Filettatura / Thread:
BSPP (ISO 1179-3)


W.P.		part number (body only)	tube Ød1	thread	Dimensions								O-Ring*
bar			mm	F	D2	L	L1	L2	L3	CH1	CH2	CH3	mm
L	200	**OL7170-01**	6	G 1/8	14,8	27	12	21	7	12	14	14	8x1,88
		OL7170-02	8	G 1/4	19,8	29	14	25	9	12	19	17	10,77x2,62
		OL7170-03	10	G 1/4	19,8	30	15	25	9	14	19	19	10,77x2,62
		OL7170-04	12	G 3/8	22,8	32	17	29	9	17	22	22	13,94x2,62
		OL7170-05	15	G 1/2	27,8	36	21	31	13	19	30	27	17x3,00
		OL7170-06	18	G 1/2	27,8	40	23,5	36	13	24	30	32	17x3,00
	160	**OL7170-07**	22	G 3/4	32,8	44	27,5	37	13	27	36	36	23,5x3,00
		OL7170-08	28	G 1	40,8	47	30,5	44	15	36	41	41	29,2x3,00
		OL7170-09	35	G 1 1/4	50,8	56	34,5	52	15	41	50	50	37,69x3,53
		OL7170-10	42	G 1 1/2	55,8	63	40	52	15	50	55	60	44,04x3,53
S	200	**OL7170-11**	6	G 1/4	19,8	31	16	25	9	12	19	17	10,77x2,62
		OL7170-12	8	G 1/4	19,8	32	17	27	9	14	19	19	10,77x2,62
		OL7170-13	10	G 3/8	22,8	34	17,5	29	9	17	22	22	13,94x2,62
		OL7170-14	12	G 3/8	22,8	38	21,5	29	9	17	22	24	13,94x2,62
		OL7170-15	16	G 1/2	27,8	43	24,5	36	13	24	30	30	17x3,00
		OL7170-16	20	G 3/4	32,8	48	26,5	39	13	27	36	36	23,5x3,00
		OL7170-17	25	G 1	40,8	54	30	44	15	36	41	46	29,2x3,00
	160	**OL7170-18**	30	G 1 1/4	50,8	62	35,5	52	15	41	50	50	37,69x3,53
		OL7170-19	38	G 1 1/2	55,8	72	41	54	15	50	55	60	44,04x3,53


* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35°a +100℃ - FPM (Viton): da -25°a +120℃

** - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35°to +100℃ - FP M (Viton): from -25°to +120℃*

OL7175 Terminale a T con Maschio orient. UNF centrale

Adjustable male stud branch tees with flare-washer thread: UNF



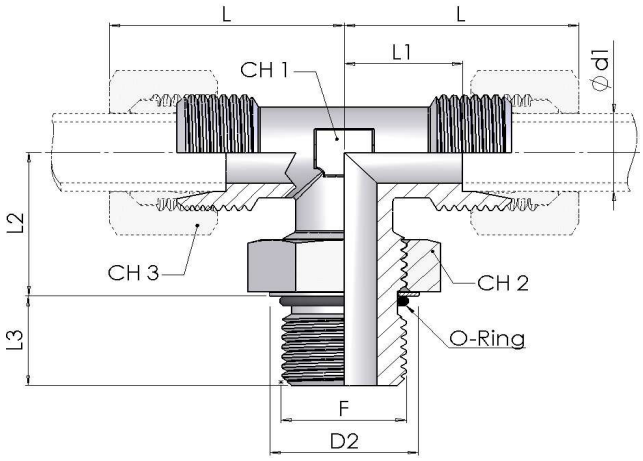

Filettatura / Thread:
UNF/UN (ISO 11926-1)

W.P.		part number (body only)	tube Ød1	thread	Dimensions								O-Ring*
bar			mm	F	D2	L	L1	L2	L3	CH1	CH2	CH3	mm
L	315	**OL7175-01**	6	7/16-20	16,5	27	12	20	10	12	14	14	9,17x1,83
		OL7175-02	8	7/16-20	16,5	29	14	20	10	12	14	17	9,17x1,83
	250	**OL7175-03**	10	9/16-18	20,2	30	15	25	11	14	17	19	11,89x1,98
		OL7175-04	12	9/16-18	20,2	32	17	25	11	17	17	22	11,89x1,98
		OL7175-05	12	3/4-16	25,7	32	17	27	13	17	22	22	16,36x2,21
		OL7175-06	15	3/4-16	25,7	36	21	27	13	19	22	27	16,36x2,21
	200	**OL7175-07**	15	7/8-14	29,3	36	21	33	15	24	27	27	19,18x2,46
		OL7175-08	18	7/8-14	29,3	40	23,5	33	15	24	27	32	19,18x2,46
		OL7175-09	18	1.1/16-12	36,7	40	23,5	36	17	27	32	32	23,47x2,95
	160	**OL7175-10**	22	1.1/16-12	36,7	44	27,5	36	17	27	32	36	23,47x2,95
		OL7175-11	28	1.5/16-12	44,0	47	30,5	42	17	36	41	41	29,74x2,95
	125	**OL7175-12**	35	1.5/8-12	55,0	56	34,5	48	17	41	50	50	37,47x3,00
		OL7175-13	42	1.7/8-12	62,3	63	40	49	17	50	55	60	43,69x3,00
S	400	**OL7175-14**	6	7/16-20	16,5	31	16	22	11	12	14	17	9,17x1,83
		OL7175-15	8	9/16-18	20,2	32	17	25	12	14	17	19	11,89x1,98
		OL7175-16	10	9/16-18	20,2	34	17,5	26	12	17	17	22	11,89x1,98
		OL7175-17	12	3/4-16	25,7	38	21,5	30	14	17	22	24	16,36x2,21
		OL7175-18	16	7/8-14	29,3	43	24,5	35	16	24	27	30	19,18x2,46
		OL7175-19	20	1.1/16-12	36,7	48	26,5	39	18,5	27	32	36	23,47x2,95
	315	**OL7175-20**	25	1.5/16-12	44,0	54	30	44	18,5	36	41	46	29,74x2,95
	250	**OL7175-21**	30	1.5/8-12	55,0	62	35,5	51	18,5	41	50	50	37,47x3,00
	200	**OL7175-22**	38	1.7/8-12	62,3	72	41	54	18,5	50	55	60	43,69x3,00

* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35°a +100℃ - FPM (Viton): da -25°a +120℃

** - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35°to +100℃ - FPM (V iton): from -25°to +120℃*


Adattatori DIN2353 / DIN2353 Adaptors


OL7180

OL7181

T DI ESTR. LAT.

Stud Barrel Tees



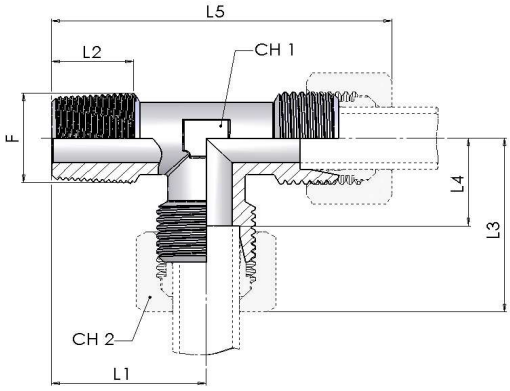

Filettatura / Thread:
BSPT (Form C DIN 3852)

W.P.		part number (body only)	Ø tube	thread	Dimensions						
bar			mm	F	L_1	L_2	L_3	L_4	L_5	CH_1	CH_2
LL	100	**OL7180-01**	4	R 1/8 K	17	8	21	11	38	9	10
		OL7180-02	6	R 1/8 K	17	8	21	9,5	38	9	12
		OL7180-03	8	R 1/8 K	20	8	23	11,5	43	12	14
L	315	**OL7180-04**	6	R 1/8 K	20	8	27	12	47	12	14
		OL7180-05	8	R 1/4 K	26	12	29	14	55	12	17
		OL7180-06	10	R 1/4 K	27	12	30	15	57	14	19
		OL7180-07	12	R 3/8 K	28	12	32	17	60	17	22
		OL7180-08	15	R 1/2 K	34	14	36	21	70	19	27
		OL7180-09	18	R 1/2 K	36	14	40	23,5	76	24	32
	160	**OL7180-10**	22	R 3/4 K	42	16	44	27,5	86	27	36
		OL7180-11	28	R 1 K	48	18	47	30,5	95	36	41
S	630	**OL7180-12**	6	R 1/4 K	26	12	31	16	57	12	17
		OL7180-13	8	R 1/4 K	27	12	32	17	59	14	19
		OL7180-14	10	R 3/8 K	28	12	34	17,5	62	17	22
		OL7180-15	12	R 3/8 K	28	12	38	21,5	66	17	24
	400	**OL7180-16**	16	R 1/2 K	32	14	43	24,5	75	24	30
		OL7180-17	20	R 3/4 K	42	16	48	26,5	90	27	36
		OL7180-18	25	R 1 K	48	18	54	30	102	36	46
		OL7180-19	30	R 1 1/4 K	54	20	62	35,5	116	41	50

Filettatura / Thread:
Metric Taper (Form C DIN 3852)

W.P.		part number (body only)	Ø tube	thread	Dimensions						
bar			mm	F	L_1	L_2	L_3	L_4	L_5	CH_1	CH_2
LL	100	**OL7181-01**	4	M 8x1 K	17	8	21	11	38	9	10
		OL7181-02	6	M 10x1 K	17	8	21	9,5	38	9	12
		OL7181-03	8	M 10x1 K	20	8	23	11,5	43	12	14
L	315	**OL7181-04**	6	M 10x1 K	20	8	27	12	47	12	14
		OL7181-05	8	M 12x1,5 K	26	12	29	14	55	12	17
		OL7181-06	10	M 14x1,5 K	27	12	30	15	57	14	19
		OL7181-07	12	M 16x1,5 K	28	12	32	17	60	17	22
		OL7181-08	15	M 18x1,5 K	32	12	36	21	70	19	27
		OL7181-09	18	M 22x1,5 K	36	14	40	23,5	76	24	32


Adattatori DIN2353 / DIN2353 Adaptors


OL7185

OL7186

Terminale a 'L'

Stud Barrel Tees



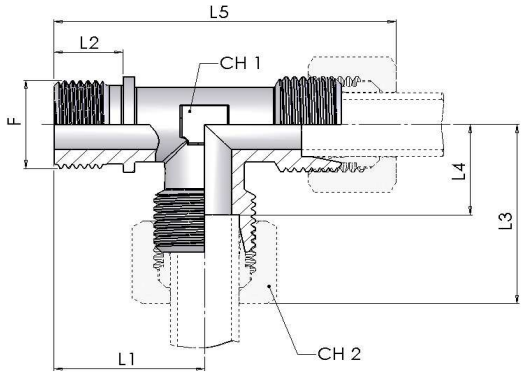

Filettatura / Thread:
BSPP (Form B DIN 3852)


W.P.		part number (body only)	Ø tube	thread	Dimensions						
bar			mm	F	L_1	L_2	L_3	L_4	L_5	CH_1	CH_2
L	160	**OL7185-01**	22	G 3/4	43,5	15	44	27,5	87,5	27	36
		OL7185-02	28	G 1	49	17	47	30,5	96	36	41
		OL7185-03	35	G 1 1/4	57	19	56	34,5	113	41	50
		OL7185-04	42	G 1 1/2	64	20	63	40	127	50	60
S	400	**OL7185-05**	20	G 3/4	43,5	15	48	26,5	91,5	27	36
		OL7185-06	25	G 1	49	17	54	30	103	36	46
	250	**OL7185-07**	30	G 1 1/4	57	19	62	35,5	119	41	50
		OL7185-08	38	G 1 1/2	64	20	72	41	136	50	60


Filettatura / Thread:
Metric (Form B DIN 3852)

W.P.		part number (body only)	Ø tube	thread	Dimensions						
bar			mm	F	L_1	L_2	L_3	L_4	L_5	CH_1	CH_2
L	160	**OL7186-01**	22	M 26x1,5	43,5	15	44	27,5	87,5	27	36
		OL7186-02	28	M 33x2	49	17	47	30,5	96	36	41
		OL7186-03	35	M 42x2	57	19	56	34,5	113	41	50
		OL7186-04	42	M 48x2	64	20	63	40	127	50	60
S	400	**OL7186-05**	20	M 27x2	43,5	15	48	26,5	91,5	27	36
		OL7186-06	25	M 33x2	49	17	54	30	103	36	46
		OL7186-07	30	M 42x2	57	19	62	35,5	119	41	50
	315	**OL7186-08**	38	M 48x2	64	20	72	41	136	50	60

OL7190 Terminale a T con Maschio orientabile BSPP laterale

Adjustable male stud run tees with flare-washer thread: BSP parallel



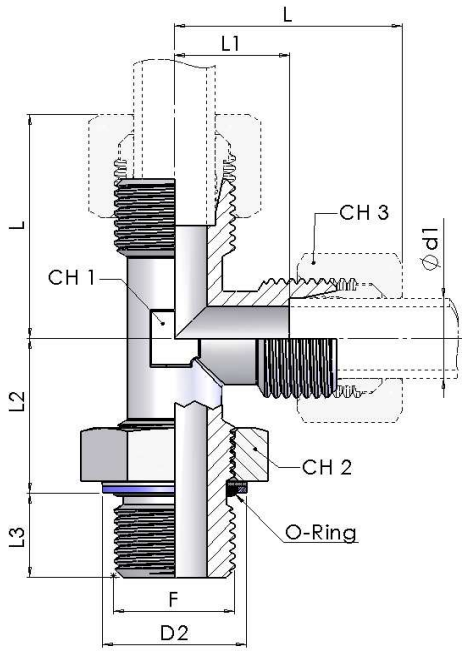

Filettatura / Thread:
BSPP (ISO 1179-3)


W.P.		part number (body only)	tube Ød1	thread	Dimensions								O-Ring*
bar			mm	F	D2	L	L1	L2	L3	CH1	CH2	CH3	mm
L	200	OL7190-01	6	G 1/8	14,8	27	12	21	7	12	14	14	8x1,88
		OL7190-02	8	G 1/4	19,8	29	14	25	9	12	19	17	10,77x2,62
		OL7190-03	10	G 1/4	19,8	30	15	25	9	14	19	19	10,77x2,62
		OL7190-04	12	G 3/8	22,8	32	17	29	9	17	22	22	13,94x2,62
		OL7190-05	15	G 1/2	27,8	36	21	31	13	19	30	27	17x3,00
		OL7190-06	18	G 1/2	27,8	40	23,5	36	13	24	30	32	17x3,00
	160	OL7190-07	22	G 3/4	32,8	44	27,5	37	13	27	36	36	23,5x3,00
		OL7190-08	28	G 1	40,8	47	30,5	44	15	36	41	41	29,2x3,00
		OL7190-09	35	G 1 1/4	50,8	56	34,5	52	15	41	50	50	37,69x3,53
		OL7190-10	42	G 1 1/2	55,8	63	40	52	15	50	55	60	44,04x3,53
S	200	OL7190-11	6	G 1/4	19,8	31	16	25	9	12	19	17	10,77x2,62
		OL7190-12	8	G 1/4	19,8	32	17	27	9	14	19	19	10,77x2,62
		OL7190-13	10	G 3/8	22,8	34	17,5	29	9	17	22	22	13,94x2,62
		OL7190-14	12	G 3/8	22,8	38	21,5	29	9	17	22	24	13,94x2,62
		OL7190-15	16	G 1/2	27,8	43	24,5	36	13	24	30	30	17x3,00
		OL7190-16	20	G 3/4	32,8	48	26,5	39	13	27	36	36	23,5x3,00
		OL7190-17	25	G 1	40,8	54	30	44	15	36	41	46	29,2x3,00
	160	OL7190-18	30	G 1 1/4	50,8	62	35,5	52	15	41	50	50	37,69x3,53
		OL7190-19	38	G 1 1/2	55,8	72	41	54	15	50	55	60	44,04x3,53


* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35°a +100℃ - FPM (Viton): da -25°a +120℃

** - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35°to +100℃ - FP M (Viton): from -25°to +120℃*

OL7195 Terminale a T con Maschio orientabile UNF laterale

Adjustable male stud run tees with flare-washer thread: UNF



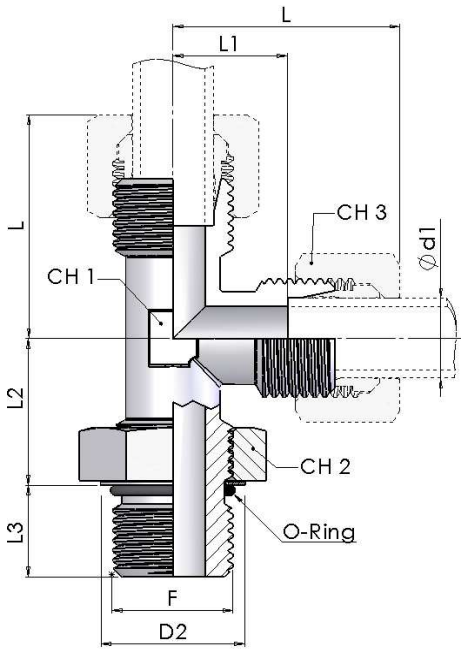

Filettatura / Thread:
UNF/UN (ISO 11926-1)


W.P.		part number (body only)	tube Ød1	thread	Dimensions								O-Ring*
bar			mm	F	D2	L	L1	L2	L3	CH1	CH2	CH3	mm
L	315	**OL7195-01**	6	7/16-20	16,5	27	12	20	10	12	14	14	9,17x1,83
		OL7195-02	8	7/16-20	16,5	29	14	20	10	12	14	17	9,17x1,83
	250	**OL7195-03**	10	9/16-18	20,2	30	15	25	11	14	17	19	11,89x1,98
		OL7195-04	12	9/16-18	20,2	32	17	25	11	17	17	22	11,89x1,98
		OL7195-05	12	3/4-16	25,7	32	17	27	13	17	22	22	16,36x2,21
		OL7195-06	15	3/4-16	25,7	36	21	27	13	19	22	27	16,36x2,21
	200	**OL7195-07**	15	7/8-14	29,3	36	21	33	15	24	27	27	19,18x2,46
		OL7195-08	18	7/8-14	29,3	40	23,5	33	15	24	27	32	19,18x2,46
		OL7195-09	18	1.1/16-12	36,7	40	23,5	36	17	27	32	32	23,47x2,95
	160	**OL7195-10**	22	1.1/16-12	36,7	44	27,5	36	17	27	32	36	23,47x2,95
		OL7195-11	28	1.5/16-12	44,0	47	30,5	42	17	36	41	41	29,74x2,95
	125	**OL7195-12**	35	1.5/8-12	55,0	56	34,5	48	17	41	50	50	37,47x3,00
		OL7195-13	42	1.7/8-12	62,3	63	40	49	17	50	55	60	43,69x3,00
S	400	**OL7195-14**	6	7/16-20	16,5	31	16	22	11	12	14	17	9,17x1,83
		OL7195-15	8	9/16-18	20,2	32	17	25	12	14	17	19	11,89x1,98
		OL7195-16	10	9/16-18	20,2	34	17,5	26	12	17	17	22	11,89x1,98
		OL7195-17	12	3/4-16	25,7	38	21,5	30	14	17	22	24	16,36x2,21
		OL7195-18	16	7/8-14	29,3	43	24,5	35	16	24	27	30	19,18x2,46
		OL7195-19	20	1.1/16-12	36,7	48	26,5	39	18,5	27	32	36	23,47x2,95
	315	**OL7195-20**	25	1.5/16-12	44,0	54	30	44	18,5	36	41	46	29,74x2,95
	250	**OL7195-21**	30	1.5/8-12	55,0	62	35,5	51	18,5	41	50	50	37,47x3,00
	200	**OL7195-22**	38	1.7/8-12	62,3	72	41	54	18,5	50	55	60	43,69x3,00


* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35°a +100℃ - FPM (Viton): da -25°a +120℃

** - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35°to +100℃ - FPM (V iton): from -25°to +120℃*

OL7200 DIRITTO INTERMEDIO

Straight couplings




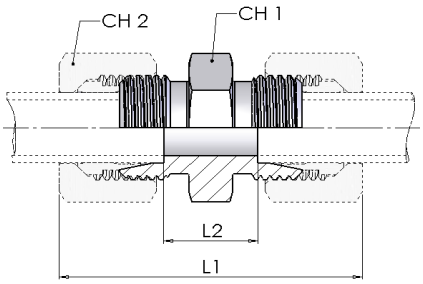


W.P.		part number (body only)	Ø tube		Dimensions			
bar			mm		L_1	L_2	CH_1	CH_2
LL	100	OL7200-01	4		31	12	12	10
		OL7200-02	6		32	9	12	12
		OL7200-03	8		35	12	12	14
		OL7200-04	10		35	12	14	17
		OL7200-05	12		35	11	17	19
L	315	OL7200-06	6		39	10	12	17
		OL7200-07	8		40	11	14	19
		OL7200-08	10		42	13	17	22
		OL7200-09	12		43	14	19	27
		OL7200-10	15		46	16	24	32
		OL7200-11	18		48	16	27	36
	160	OL7200-12	22		52	20	32	41
		OL7200-13	28		54	21	41	50
		OL7200-14	35		63	20	46	60
		OL7200-15	42		66	21	55	17
S	630	OL7200-16	6		45	16	14	19
		OL7200-17	8		47	18	17	22
		OL7200-18	10		49	17	19	24
		OL7200-19	12		51	19	22	24
		OL7200-20	14		57	22	24	27
	400	OL7200-21	16		57	21	27	30
		OL7200-22	20		66	23	32	36
		OL7200-23	25		74	26	41	46
		OL7200-24	30		80	27	46	50
	315	OL7200-25	38		90	29	55	60

OL7205 Intermedio diritto ridotto

Reduced Straight couplings




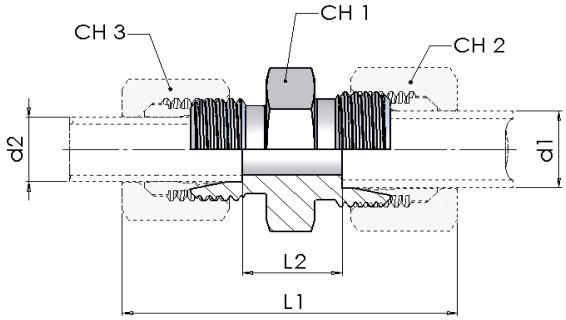


W.P.		part number (body only)	Ø tube		Dimensions				
			d_1	d_2					
bar			mm	mm	L_1	L_2	CH_1	CH_2	CH_3
LL	100	OL7205-01	6	4	32	10,5	12	12	10
		OL7205-02	8	4	34	12,5	12	14	10
		OL7205-03	8	6	34	11	12	14	12
L	315	OL7205-04	8	6	40,5	11	14	17	14
		OL7205-05	10	6	41,5	12	17	19	14
		OL7205-06	10	8	42	12	17	19	17
		OL7205-07	12	6	42	13	19	22	14
		OL7205-08	12	8	42,5	13	19	22	17
		OL7205-09	12	10	43,5	14	19	22	19
		OL7205-10	15	10	45	15	24	27	19
		OL7205-11	15	12	44,5	15	24	27	22
		OL7205-12	18	10	47	15,5	27	32	19
		OL7205-13	18	12	46,5	15,5	27	32	22
		OL7205-14	18	15	48	16,5	27	32	27
	160	OL7205-15	22	12	48,5	17,5	32	36	22
		OL7205-16	22	15	50	18,5	32	36	27
		OL7205-17	22	18	51	18	32	36	32
		OL7205-18	28	18	52	19	41	41	32
		OL7205-19	28	22	54	21	41	41	36
		OL7205-20	35	22	59	21	46	50	36
		OL7205-21	35	28	59	21	46	50	41
S	630	OL7205-22	8	6	48	18	17	19	17
		OL7205-23	10	6	48,5	17,5	19	22	17
		OL7205-24	10	8	48,5	17,5	19	22	19
		OL7205-25	12	6	50,5	19,5	22	24	17
		OL7205-26	12	8	50,5	19,5	22	24	19
		OL7205-27	12	10	51	19	22	24	22
		OL7205-28	14	10	54,5	20,5	24	27	22
		OL7205-29	14	12	54,5	20,5	24	27	24
	400	OL7205-30	16	12	54,5	20	27	30	24
		OL7205-31	16	14	58	21,5	27	30	27
		OL7205-32	20	10	59,5	22	32	36	22
		OL7205-33	20	12	59,5	22	332	36	24
		OL7205-34	20	16	63	23	32	36	30
		OL7205-35	25	16	68	25,5	41	46	30
		OL7205-36	25	20	71	25,5	41	46	36
		OL7205-37	30	20	74	26	46	50	36
		OL7205-38	30	25	77	26,5	46	50	46
	315	OL7205-39	38	30	87	29,5	55	60	50

OL7210 Intermedio a gomito

Equal Elbows




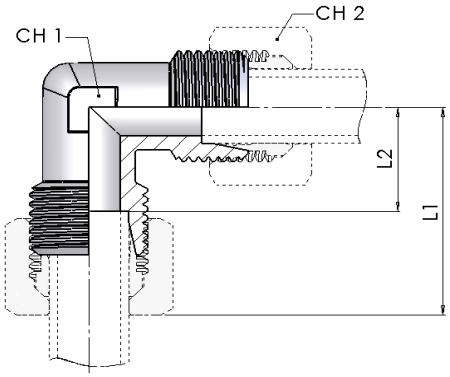


W.P.		part number (body only)	Ø tube		Dimensions			
bar			mm		L_1	L_2	CH_1	CH_2
LL	100	OL7210-01	4		21	11	10	9
		OL7210-02	6		21	9,5	12	9
		OL7210-03	8		21	11	9	10
		OL7210-04	10		21	9,5	9	12
		OL7210-05	12		23	11,5	12	14
L	315	OL7210-06	6		27	12	12	14
		OL7210-07	8		29	14	12	17
		OL7210-08	10		30	15	14	19
		OL7210-09	12		32	17	17	22
		OL7210-10	15		36	21	19	27
		OL7210-11	18		40	23,5	24	32
	160	OL7210-12	22		44	27,5	27	36
		OL7210-13	28		47	30,5	36	41
		OL7210-14	35		56	34,5	41	50
		OL7210-15	42		63	40	50	60
S	630	OL7210-16	6		31	16	12	17
		OL7210-17	8		32	17	14	19
		OL7210-18	10		34	17,5	17	22
		OL7210-19	12		38	21,5	17	24
		OL7210-20	14		40	22	19	27
	400	OL7210-21	16		43	24,5	24	30
		OL7210-22	20		48	26,5	27	36
		OL7210-23	25		54	30	36	46
		OL7210-24	30		62	35,5	41	50
	315	OL7210-25	38		72	41	50	60

OL7215 Intermedio a 'T'

Equal Tees




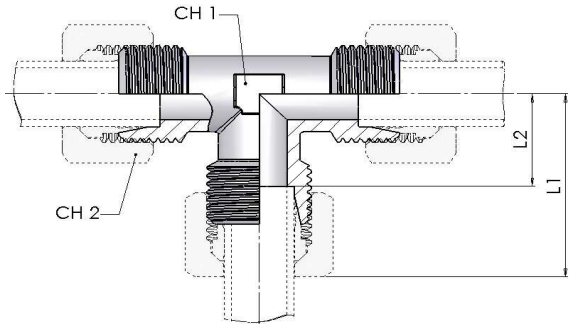


W.P.		part number (body only)	Ø tube		Dimensions			
bar			mm		L_1	L_2	CH_1	CH_2
LL	100	OL7215-01	4		21	11	9	10
		OL7215-02	6		21	9,5	9	12
		OL7215-03	8		23	11,5	12	14
		OL7215-04	10		27	15	14	17
		OL7215-05	12		25	13	17	19
L	315	OL7215-06	6		27	12	12	14
		OL7215-07	8		29	14	12	17
		OL7215-08	10		30	15	14	19
		OL7215-09	12		32	17	17	22
		OL7215-10	15		36	21	19	27
		OL7215-11	18		40	23,5	24	32
	160	OL7215-12	22		44	27,5	27	36
		OL7215-13	28		47	30,5	36	41
		OL7215-14	35		56	34,5	41	50
		OL7215-15	42		63	40	50	60
S	630	OL7215-16	6		31	16	12	17
		OL7215-17	8		32	17	14	19
		OL7215-18	10		34	17,5	17	22
		OL7215-19	12		38	21,5	17	24
		OL7215-20	14		40	22	19	27
	400	OL7215-21	16		16	43	24,5	24
		OL7215-22	20		20	48	26,5	27
		OL7215-23	25		25	54	30	36
		OL7215-24	30		30	62	35,5	41
	315	OL7215-25	38		38	72	41	50

OL7220 Intermedio a croce

Equal Crosses



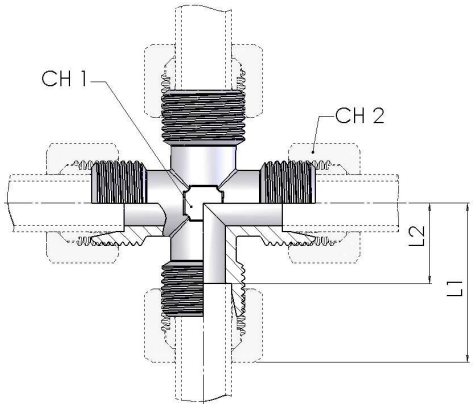



W.P.		part number (body only)	Ø tube		Dimensions			
bar			mm		L_1	L_2	CH_1	CH_2
LL	100	OL7220-01	4		21	11	9	10
		OL7220-02	6		21	9,5	9	12
		OL7220-03	8		23	11,5	12	14
L	315	OL7220-04	6		27	12	12	14
		OL7220-05	8		29	14	12	17
		OL7220-06	10		30	15	14	19
		OL7220-07	12		32	17	17	22
		OL7220-08	15		36	21	19	27
		OL7220-09	18		40	23,5	24	32
	160	OL7220-10	22		44	27,5	27	36
		OL7220-11	28		47	30,5	36	41
		OL7220-12	35		56	34,5	41	50
		OL7220-13	42		63	40	50	60
S	630	OL7220-14	6		31	16	12	17
		OL7220-15	8		32	17	14	19
		OL7220-16	10		34	17,5	17	22
		OL7220-17	12		38	21,5	17	24
		OL7220-18	14		40	22	19	27
	400	OL7220-19	16		43	24,5	24	30
		OL7220-20	20		48	26,5	27	36
		OL7220-21	25		54	30	36	46
		OL7220-22	30		62	35,5	41	50
	315	OL7220-23	38		72	41	50	60

Adattatori DIN2353 / DIN2353 Adaptors

OL7225 Passaparete Diritto

Straight Bulkhead Union




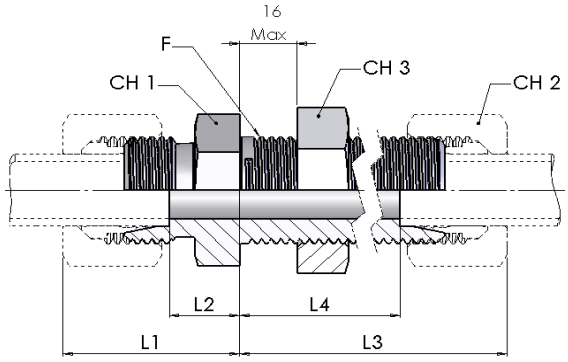


W.P.		part number (body only)	Ø tube	thread	Dimensions						
bar			mm	F	L_1	L_2	L_3	L_4	CH_1	CH_2	CH_3
L	315	OL7225-01	6	M 12x1,5	22	7	42	27	17	14	17
		OL7225-02	8	M 14x1,5	23	8	42	27	19	17	19
		OL7225-03	10	M 16x1,5	25	10	43	28	22	19	22
		OL7225-04	12	M 18x1,5	25	10	44	29	24	22	24
		OL7225-05	15	M 22x1,5	27	12	46	31	27	27	30
		OL7225-06	18	M 26x1,5	30	13,5	49	32,5	32	32	36
	160	OL7225-07	22	M 30x2	33	16,5	51	34,5	36	36	41
		OL7225-08	28	M 36x2	35	18,5	52	35,5	41	41	46
		OL7225-09	35	M 45x2	40	18,5	58	36,5	50	50	55
		OL7225-10	42	M 52x2	42	19	59	36	60	60	65
S	630	OL7225-11	6	M 14x1,5	27	12	44	29	19	17	19
		OL7225-12	8	M 16x1,5	28	13	44	29	22	19	22
		OL7225-13	10	M 18x1,5	31	14,5	46	29,5	24	22	24
		OL7225-14	12	M 20x1,5	31	14,5	47	30,5	27	24	27
		OL7225-15	14	M 22x1,5	35	17	50	32	30	27	30
	400	OL7225-16	16	M 24x1,5	35	16,5	50	31,5	32	30	32
		OL7225-17	20	M 30x2	39	17,5	55	33,5	41	36	41
		OL7225-18	25	M 36x2	44	20	59	35	46	46	46
		OL7225-19	30	M 42x2	48	21,5	64	37,5	50	50	50
	315	OL7225-20	38	M 52x2	53	22	68	30	65	60	65

OL7230 Passaparete a 90°

Bulkhead 90° Elbow Union




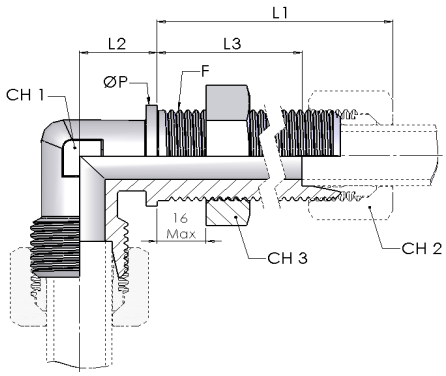


W.P.		part number (body only)	Ø tube	thread	Dimensions						
bar			mm	F	L_1	L_2	L_3	ØP	CH_1	CH_2	CH_3
L	315	OL7230-01	6	M 12x1,5	42	14	27	17	12	14	17
		OL7230-02	8	M 14x1,5	42	17	27	19	12	17	19
		OL7230-03	10	M 16x1,5	43	18	28	22	14	19	22
		OL7230-04	12	M 18x1,5	44	20	29	24	17	22	24
		OL7230-05	15	M 22x1,5	46	23	31	27	19	27	30
		OL7230-06	18	M 26x1,5	49	24	32,5	32	24	32	36
	160	OL7230-07	22	M 30x2	51	30	34,5	36	27	36	41
		OL7230-08	28	M 36x2	52	34	35,5	42	36	41	46
		OL7230-09	35	M 45x2	58	39	36,5	50	41	50	55
		OL7230-10	42	M 52x2	59	43	36	60	50	60	65
S	630	OL7230-11	6	M 14x1,5	44	17	29	19	12	17	19
		OL7230-12	8	M 16x1,5	44	18	29	22	14	19	22
		OL7230-13	10	M 18x1,5	46	20	29,5	24	17	22	24
		OL7230-14	12	M 20x1,5	47	21	30,5	27	17	24	27
		OL7230-15	14	M 22x1,5	50	23	32	27	19	27	30
	400	OL7230-16	16	M 24x1,5	50	24	31,5	30	24	30	32
		OL7230-17	20	M 30x2	55	30	33,5	36	27	36	41
		OL7230-18	25	M 36x2	59	34	35	42	36	46	46
		OL7230-19	30	M 42x2	64	39	37,5	50	41	50	50
	315	OL7230-20	38	M 52x2	68	43	37	60	50	60	65

OL7235 Raccordo diritto per combinazioni guarnizione gomma / O-Ring

Stud/Standpipe Adaptors Packing ring/ O-Ring Seal



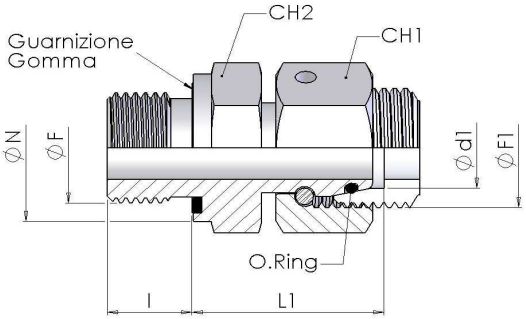

Filettatura / Thread:
BSPP (Form E DIN 3852)


W.P.		part number	Ø tube	Dimensions							O-Ring*
bar			d1	L_1	ØF	I	CH_2	ØN	$ØF_1$	CH_1	mm
L	315	**OL7235-01**	6	24,5	1/8"	8	14	14	12x1,5	14	4x1,5
		OL7235-02	8	29,5	1/4"	12	19	19	14x1,5	17	6x1,5
		OL7235-03	10	27,5	1/4"	12	19	19	16x1,5	19	7,5x1,5
		OL7235-04	12	34	3/8"	12	22	22	18x1,5	22	9x1,5
		OL7235-05	15	32	1/2"	14	27	27	22x1,5	27	12x2
		OL7235-06	18	31,5	1/2"	14	27	27	26x1,5	32	15x2
	160	**OL7235-07**	22	32,5	3/4"	16	32	32	30x2	36	20x2
		OL7235-08	28	35	1"	18	41	40	36x2	41	26x2
		OL7235-09	35	42,5	1" 1/4	20	50	50	45x2	50	32x2,5
		OL7235-10	42	46,5	1" 1/2	22	55	55	52x2	60	38x2,5
S	630	**OL7235-11**	6	27	1/4"	12	19	19	14x1,5	17	4x1,5
		OL7235-12	8	29,5	1/4"	12	19	19	16x1,5	19	6x1,5
		OL7235-13	10	32	3/8"	12	22	22	18x1,5	22	7,5x1,5
		OL7235-14	12	34	3/8"	12	22	22	20x1,5	24	9x1,5
		OL7235-15	14	36,5	1/2"	14	27	27	22x1,5	27	10x2
	400	**OL7235-16**	16	37	1/2"	14	27	27	24x1,5	30	12x2
		OL7235-17	20	43	3/4"	16	32	32	30x2	36	16,3x2,4
		OL7235-18	25	48	1"	18	41	40	36x2	46	20,3x2,4
		OL7235-19	30	51	1" 1/4	20	50	50	42x2	50	25,3x2,4
	315	**OL7235-20**	38	60	1" 1/2	22	55	55	52x2	60	33,3x2,4


* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35°a +100℃ - FPM (Viton): da -25°a +120℃

** - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35°to +100℃ - FPM (Viton): f rom -25°to +120℃*

OL7236 Raccordo diritto per combinazioni guarnizione gomma / O-Ring

Stud/Standpipe Adaptors Packing ring/ O-Ring Seal



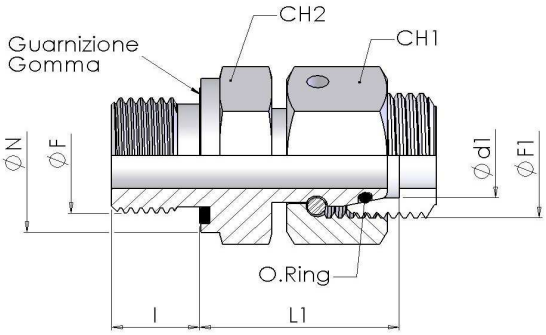

Filettatura / Thread:
Metric (Form E DIN 3852)

W.P.		part number	Ø tube	Dimensions							O-Ring*
bar			d1	L1	ØF	l	CH2	ØN	ØF1	CH1	mm
L	315	**OL7236-01**	6	24,5	10x1	8	14	14	12x1,5	14	4x1,5
		OL7236-02	8	26,5	12x1,5	12	17	17	14x1,5	17	6x1,5
		OL7236-03	10	27,5	14x1,5	12	19	19	16x1,5	19	7,5x1,5
		OL7236-04	12	30,5	16x1,5	12	22	22	18x1,5	22	9x1,5
		OL7236-05	15	31,5	18x1,5	12	24	24	22x1,5	27	12x2
		OL7236-06	18	31,5	22x1,5	14	27	27	26x1,5	32	15x2
	160	**OL7236-07**	22	32,5	26x1,5	16	32	32	30x2	36	20x2
		OL7236-08	28	35	33x2	18	41	40	36x2	41	26x2
		OL7236-09	35	42,5	42x2	20	50	50	45x2	50	32x2,5
		OL7236-10	42	46,5	48x2	22	55	55	52x2	60	38x2,5
S	630	**OL7236-11**	6	27	12x1,5	12	17	17	14x1,5	17	4x1,5
		OL7236-12	8	29,5	14x1,5	12	19	19	16x1,5	19	6x1,5
		OL7236-13	10	32	16x1,5	12	22	22	18x1,5	22	7,5x1,5
		OL7236-14	12	34	18x1,5	12	24	24	20x1,5	24	9x1,5
		OL7236-15	14	36,5	20x1,5	14	27	26	22x1,5	27	10x2
	400	**OL7236-16**	16	37	22x1,5	14	27	27	24x1,5	30	12x2
		OL7236-17	20	43	27x2	16	32	32	30x2	36	16,3x2,4
		OL7236-18	25	48	33x2	18	41	40	36x2	46	20,3x2,4
		OL7236-19	30	51	42x2	20	50	50	42x2	50	25,3x2,4
	315	**OL7236-20**	38	60	48x2	22	55	55	52x2	60	33,3x2,4


* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35° a +100° C - FPM (Viton): da -25° a +120°C


** - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35°to +100°C - FPM (Viton): f rom -25°to +120°C*

OL7240

Raccordo di riduzione semplice con O-Ring - (serie L)

Standpipe/Tube Reducers 'L' Series with O-Ring Seal



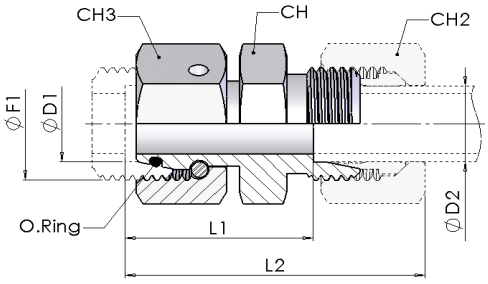

W.P.		part number (body only)	Dimensions								O-Ring*
bar			ØD1	ØD2	L1	L2	CH2	CH3	ØF1	CH	mm
L	315	OL7240-01	8	6	23,5	38	14	17	14x1,5	12	6x1,5
		OL7240-02	10	6	25,0	40	14	19	16x1,5	14	7,5x1,5
		OL7240-03	10	8	25,0	40	17	19	16x1,5	14	7,5x1,5
		OL7240-04	12	6	25,0	40	14	22	18x1,5	17	9x1,5
		OL7240-05	12	8	25,0	40	17	22	18x1,5	17	9x1,5
		OL7240-06	12	10	26,0	41	19	22	18x1,5	17	9x1,5
		OL7240-07	15	6	28,5	43	14	27	22x1,5	19	12x2
		OL7240-08	15	8	28,5	43	17	27	22x1,5	19	12x2
		OL7240-09	15	10	29,5	44	19	27	22x1,5	19	12x2
		OL7240-10	15	12	29,5	44	22	27	22x1,5	19	12x2
		OL7240-11	18	6	28,0	43	14	32	26x1,5	24	15x2
		OL7240-12	18	8	28,0	43	17	32	26x1,5	24	15x2
		OL7240-13	18	10	29,0	44	19	32	26x1,5	24	15x2
		OL7240-14	18	12	29,0	44	22	32	26x1,5	24	15x2
		OL7240-15	18	15	30,0	45	27	32	26x1,5	24	15x2
	160	OL7240-16	22	6	32,0	47	14	36	30x2	27	20x2
		OL7240-17	22	8	32,0	47	17	36	30x2	27	20x2
		OL7240-18	22	10	33,0	48	19	36	30x2	27	20x2
		OL7240-19	22	12	33,0	48	22	36	30x2	27	20x2
		OL7240-20	22	15	34,0	49	27	36	30x2	27	20x2
		OL7240-21	22	18	33,5	50	32	36	30x2	27	20x2
		OL7240-22	28	6	34,0	49	14	41	36x2	32	26x2
		OL7240-23	28	8	34,0	49	17	41	36x2	32	26x2
		OL7240-24	28	10	35,0	50	19	41	36x2	32	26x2
		OL7240-25	28	12	35,0	50	22	41	36x2	32	26x2
		OL7240-26	28	15	36,0	51	27	41	36x2	32	26x2
		OL7240-27	28	18	36,5	52	32	41	36x2	32	26x2
		OL7240-28	28	22	37,5	54	36	41	36x2	32	26x2
		OL7240-29	35	6	37,0	52	14	50	45x2	41	32x2,5
		OL7240-30	35	8	37,0	52	17	50	45x2	41	32x2,5
		OL7240-31	35	10	38,0	53	19	50	45x2	41	32x2,5
		OL7240-32	35	12	38,0	53	22	50	45x2	41	32x2,5
		OL7240-33	35	15	39,0	54	27	50	45x2	41	32x2,5
		OL7240-34	35	18	38,5	55	32	50	45x2	41	32x2,5
		OL7240-35	35	22	40,5	57	36	50	45x2	41	32x2,5
		OL7240-36	35	28	40,5	57	41	50	45x2	41	32x2,5
		OL7240-37	42	6	40,5	55	14	60	52x2	50	38x2,5
		OL7240-38	42	8	40,5	55	17	60	52x2	50	38x2,5
		OL7240-39	42	10	41,5	56	19	60	52x2	50	38x2,5
		OL7240-40	42	12	41,5	56	22	60	52x2	50	38x2,5
		OL7240-41	42	15	42,5	58	27	60	52x2	50	38x2,5
		OL7240-42	42	18	42,0	58	32	60	52x2	50	38x2,5
		OL7240-43	42	22	44,0	60	36	60	52x2	50	38x2,5
		OL7240-44	42	28	44,0	61	41	60	52x2	50	38x2,5
		OL7240-45	42	35	43,0	65	50	60	52x2	50	38x2,5


* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35°a +100℃ - FPM (Viton): da -25° a +120℃


* - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35° to +100℃ - FPM (Viton): from -25°to +120℃

OL7241

Raccordo di riduzione semplice con O-Ring - (serie S)

Standpipe/Tube Reducers 'S' Series with O-Ring Seal



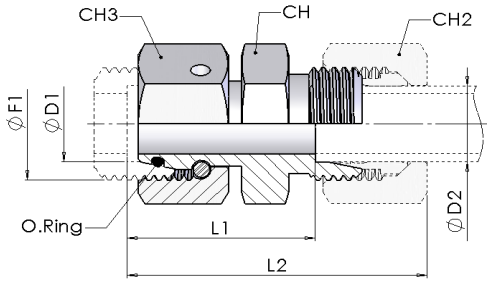


W.P.		part number (body only)	Dimensions								O-Ring*
bar			$ØD_1$	$ØD_2$	L_1	L_2	CH_2	CH_3	$ØF_1$	CH	mm
S	630	**OL7241-01**	8	6	27,0	42	17	19	16x1,5	14	6x1,5
		OL7241-02	10	6	27,5	42	17	22	18x1,5	17	7,5x1,5
		OL7241-03	10	8	27,5	42	19	22	18x1,5	17	7,5x1,5
		OL7241-04	12	6	29,0	44	17	24	20x1,5	17	9x1,5
		OL7241-05	12	8	29,0	44	19	24	20x1,5	17	9x1,5
		OL7241-06	12	10	29,5	46	22	24	20x1,5	19	9x1,5
		OL7241-07	14	6	31,5	46	17	27	22x1,5	19	10x2
		OL7241-08	14	8	31,5	46	19	27	22x1,5	19	10x2
		OL7241-09	14	10	31,0	47	22	27	22x1,5	19	10x2
		OL7241-10	14	12	31,0	47	24	27	22x1,5	22	10x2
	400	**OL7241-11**	16	6	32,0	47	17	30	24x1,5	22	12x2
		OL7241-12	16	8	32,0	47	19	30	24x1,5	22	12x2
		OL7241-13	16	10	31,5	48	22	30	24x1,5	22	12x2
		OL7241-14	16	12	31,5	48	24	30	24x1,5	22	12x2
		OL7241-15	16	14	33,0	51	27	30	24x1,5	24	12x2
		OL7241-16	20	6	36,0	51	17	36	30x2	27	16,3x2,4
		OL7241-17	20	8	36,0	51	19	36	30x2	27	16,3x2,4
		OL7241-18	20	10	35,5	52	22	36	30x2	27	16,3x2,4
		OL7241-19	20	12	35,5	52	24	36	30x2	27	16,3x2,4
		OL7241-20	20	14	37,0	55	27	36	30x2	27	16,3x2,4
		OL7241-21	20	16	36,5	55	30	36	30x2	27	16,3x2,4
		OL7241-22	25	6	38,5	53	17	46	36x2	32	20,3x2,4
		OL7241-23	25	8	38,5	53	19	46	36x2	32	20,3x2,4
		OL7241-24	25	10	38,0	54	22	46	36x2	32	20,3x2,4
		OL7241-25	25	12	38,0	54	24	46	36x2	32	20,3x2,4
		OL7241-26	25	14	39,5	57	27	46	36x2	32	20,3x2,4
		OL7241-27	25	16	39,0	57	30	46	36x2	32	20,3x2,4
		OL7241-28	25	20	39,0	61	36	46	36x2	32	20,3x2,4
		OL7241-29	30	6	44,0	59	17	50	42x2	41	25,3x2,4
		OL7241-30	30	8	44,0	59	19	50	42x2	41	25,3x2,4
		OL7241-31	30	10	43,5	60	22	50	42x2	41	25,3x2,4
		OL7241-32	30	12	43,5	60	24	50	42x2	41	25,3x2,4
		OL7241-33	30	14	45,0	63	27	50	42x2	41	25,3x2,4
		OL7241-34	30	16	44,5	63	30	50	42x2	41	25,3x2,4
		OL7241-35	30	20	44,5	66	36	50	42x2	41	25,3x2,4
		OL7241-36	30	25	45,0	69	46	50	42x2	41	25,3x2,4
	315	**OL7241-37**	38	6	47,5	62	17	60	52x2	50	33,3x2,4
		OL7241-38	38	8	47,5	62	19	60	52x2	50	33,3x2,4
		OL7241-39	38	10	47,0	63	22	60	52x2	50	33,3x2,4
		OL7241-40	38	12	47,0	63	24	60	52x2	50	33,3x2,4
		OL7241-41	38	14	48,5	66	27	60	52x2	50	33,3x2,4
		OL7241-42	38	16	48,0	66	30	60	52x2	50	33,3x2,4
		OL7241-43	38	20	48,0	70	36	60	52x2	50	33,3x2,4
		OL7241-44	38	25	48,5	73	46	60	52x2	50	33,3x2,4
		OL7241-45	38	30	49,0	76	50	60	52x2	50	33,3x2,4


* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35°a +100℃ - FPM (Viton): da -25° a +120℃

* - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35° to +100℃ - FPM (Viton): from -25°to +120℃

OL7245 Raccordo intermedio diritto con O-Ring

Straight coupling with O-Ring



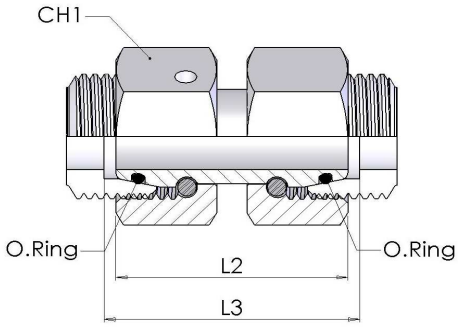

W.P.		part number	Ø Tube	Dimension			O-Ring*	
bar				L_2	L_3	CH_1	mm	
L	315	**OL7245-01**	6	34	35	14	4x1,5	
		OL7245-02	8	34	35	17	6x1,5	
		OL7245-03	10	36	37	19	7,5x1,5	
		OL7245-04	12	36	37	22	9x1,5	
		OL7245-05	15	39	40	27	12x2	
		OL7245-06	18	40,5	41,5	32	15x2	
	160	**OL7245-07**	22	45	46	36	20x2	
		OL7245-08	28	47	48	41	26x2	
		OL7245-09	35	53	56	50	32x2,5	
		OL7245-10	42	53	57	60	38x2,5	
S	630	**OL7245-11**	6	37	38	17	4x1,5	
		OL7245-12	8	37	38	19	6x1,5	
		OL7245-13	10	41	43	22	7,5x1,5	
		OL7245-14	12	42	44	24	9x1,5	
		OL7245-15	14	45	48	27	10x2	
	400	**OL7245-16**	16	46	49	30	12x2	
		OL7245-17	20	55	59	36	16,3x2,4	
		OL7245-18	25	58	65	46	20,3x2,4	
		OL7245-19	30	62	71	50	25,3x2,4	
	315	**OL7245-20**	38	67	82	60	33,3x2,4	

* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35° a +100° C - FPM (Viton): da -25° a +120°C

** - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35°to +100°C - FPM (Viton): f rom -25°to +120°C*


Adattatori DIN2353 / DIN2353 Adaptors

OL7250
OL7251

Bocchettone diritto premontato con O-Ring

Stud /Standpipe Adaptors



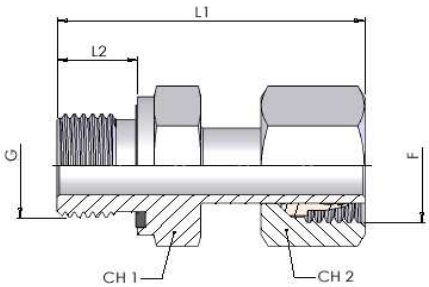

Filettatura / Thread:
BSPP (Form E DIN 3852)


W.P.		part number	Ø tube	thread		Dimensions			
bar			mm	G	F	L_1	L_2	CH_1	CH_2
L	315	**OL7250-01**	6	G 1/8	M 12x1,5	24,5	8	14	14
		OL7250-02	8	G 1/4	M 14x1,5	29,5	12	19	17
		OL7250-03	10	G 1/4	M 16x1,5	27,5	12	19	19
		OL7250-04	12	G 3/8	M 18x1,5	34	12	22	22
		OL7250-05	15	G 1/2	M 22x1,5	32	14	27	27
		OL7250-06	18	G 1/2	M 26x1,5	31,5	14	27	32
	160	**OL7250-07**	22	G 3/4	M 30x2	32,5	16	32	36
		OL7250-08	28	G 1	M 36x2	35	18	41	41
		OL7250-09	35	G 1 1/4	M 45x2	42,5	20	50	50
		OL7250-10	42	G 1 1/2	M 52x2	46,5	22	55	60
S	630	**OL7250-11**	6	G 1/4	M 14x1,5	27	12	19	17
		OL7250-12	8	G 1/4	M 16x1,5	29,5	12	19	19
		OL7250-13	10	G 3/8	M 18x1,5	32	12	22	22
		OL7250-14	12	G 3/8	M 20x1,5	34	12	22	24
		OL7250-15	14	G 1/2	M 22x1,5	36,5	14	27	27
	400	**OL7250-16**	16	G 1/2	M 24x1,5	37	14	27	30
		OL7250-17	20	G 3/4	M 30x2	43	16	32	36
		OL7250-18	25	G 1	M 36x2	48	18	41	46
		OL7250-19	30	G 1 1/4	M 42x2	51	20	50	50
	315	**OL7250-20**	38	G 1 1/2	M 52x2	60	22	55	60


Filettatura / Thread:
Metric (Form E DIN 3852)

W.P.		part number	Ø tube	thread		Dimensions			
bar			mm	M	F	L_1	L_2	CH_1	CH_2
L	315	**OL7251-01**	6	M 10x1	M 12x1,5	24,5	8	14	14
		OL7251-02	8	M 12x1,5	M 14x1,5	26,5	12	17	17
		OL7251-03	10	M 14x1,5	M 16x1,5	27,5	12	19	19
		OL7251-04	12	M 16x1,5	M 18x1,5	30,5	12	22	22
		OL7251-05	15	M 18x1,5	M 22x1,5	31,5	12	24	27
		OL7251-06	18	M 22x1,5	M 26x1,5	31,5	14	27	32
	160	**OL7251-07**	22	M 26x1,5	M 30x2	32,5	16	32	36
		OL7251-08	28	M 33x2	M 36x2	35	18	41	41
		OL7251-09	35	M 42x2	M 45x2	42,5	20	50	50
		OL7251-10	42	M 48x2	M 52x2	46,5	22	55	60
S	630	**OL7251-11**	6	M 12x1,5	M 14x1,5	27	12	17	17
		OL7251-12	8	M 14x1,5	M 16x1,5	29,5	12	19	19
		OL7251-13	10	M 16x1,5	M 18x1,5	32	12	22	22
		OL7251-14	12	M 18x1,5	M 20x1,5	34	12	24	24
		OL7251-15	14	M 20x1,5	M 22x1,5	36,5	14	27	27
	400	**OL7251-16**	16	M 22x1,5	M 24x1,5	37	14	27	30
		OL7251-17	20	M 27x2	M 30x2	43	16	32	36
		OL7251-18	25	M 33x2	M 36x2	48	18	41	46
		OL7251-19	30	M 42x2	M 42x2	51	20	50	50
	315	**OL7251-20**	38	M 48x2	M 52x2	60	22	55	60

OL7255 Bocchettone diritto premontato

Stud /Standpipe Adaptors



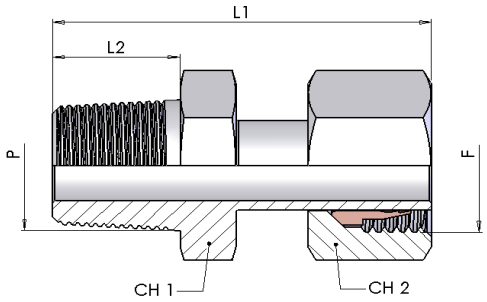


Filettatura / Thread:
NPT (ANSI/ASME B1,20,1-1983)


W.P.		part number	Ø tube	thread		Dimensions			
bar			mm	P	F	L_1	L_2	CH_1	CH_2
L	315	**OL7255-01**	6	1/8 NPT	M 12x1,5	33	10	12	14
		OL7255-02	8	1/4 NPT	M 14x1,5	42,5	15	14	17
		OL7255-03	10	1/4 NPT	M 16x1,5	40,5	15	14	19
		OL7255-04	12	3/8 NPT	M 18x1,5	46,5	15	19	22
		OL7255-05	15	1/2 NPT	M 22x1,5	48,5	19,5	22	27
		OL7255-06	18	1/2 NPT	M 26x1,5	48	19,5	22	32
S	630	**OL7255-07**	6	1/4 NPT	M 14x1,5	40	15	14	17
		OL7255-08	10	3/8 NPT	M 18x1,5	44,5	15	19	22
		OL7255-09	12	3/8 NPT	M 20x1,5	46,5	15	19	24
		OL7255-10	14	1/2 NPT	M 22x1,5	53	19,5	22	27
	400	**OL7255-11**	16	1/2 NPT	M 24x1,5	53,5	19,5	22	30

Adattatori DIN2353 / DIN2353 Adaptors

OL7260 Riduzione a codolo premontato - (serie L)

Standpipe/Tube Reducers - (L series)




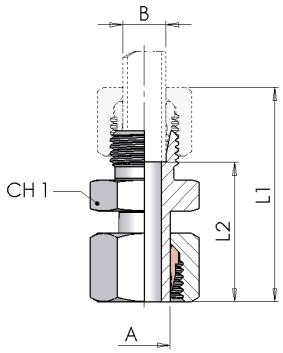


W.P.		part number (body only)	Ø tube		Dimensions			
			A	B				
bar			mm	mm	L1	L2	CH1	
LL	100	OL7260-01	6	4	34,5	23	11	
		OL7260-02	8	4	35	23,5	11	
		OL7260-03	8	6	33,5	22	11	
LL/L	315	OL7260-04	6	4	35	23,0	11	
		OL7260-05	8	4	35,0	24	11	
		OL7260-06	10	4	40	28,5	11	
		OL7260-07	12	4	40,0	29	14	
L	315	OL7260-08	8	6	40	25,5	14	
		OL7260-09	10	8	42,0	27	17	
		OL7260-10	12	6	42	27,0	14	
		OL7260-11	12	8	42,0	27	17	
		OL7260-12	12	10	43	28,0	17	
		OL7260-13	15	6	41,5	27	17	
		OL7260-14	15	8	42	27,0	17	
		OL7260-15	15	10	43,0	28	17	
		OL7260-16	15	12	44	29,0	19	
		OL7260-17	18	6	44,0	30	19	
		OL7260-18	18	8	45	29,5	19	
		OL7260-19	18	10	45,5	31	19	
		OL7260-20	18	12	45	30,5	19	
		OL7260-21	18	15	46,5	32	24	
	160	OL7260-22	22	6	45	30,5	24	
		OL7260-23	22	8	45,5	31	24	
		OL7260-24	22	10	47	31,5	24	
		OL7260-25	22	12	46,0	32	24	
		OL7260-26	22	15	48	32,5	24	
		OL7260-27	22	18	49,0	33	27	
		OL7260-28	28	6	47	32,0	32	
		OL7260-29	28	8	47,0	32	32	
		OL7260-30	28	10	48	33,0	32	
		OL7260-31	28	12	47,5	33	32	
		OL7260-32	28	15	49	34,0	32	
		OL7260-33	28	18	50,0	34	32	
		OL7260-34	28	22	52	35,5	32	
		OL7260-35	35	6	53,0	39	36	
		OL7260-36	35	8	54	38,5	36	
		OL7260-37	35	10	54,5	40	36	
		OL7260-38	35	12	54	39,5	36	
		OL7260-39	35	15	55,5	41	36	
		OL7260-40	35	18	57	40,0	36	
		OL7260-41	38	22	58,5	42	36	
		OL7260-42	35	28	59	42,0	41	
		OL7260-43	42	10	55,5	41	46	
		OL7260-44	42	12	55	40,5	46	
		OL7260-45	42	15	56,5	42	46	
		OL7260-46	42	18	57,5	41	46	
		OL7260-47	42	22	59,5	43	46	
		OL7260-48	42	28	59,5	43	46	
		OL7260-49	42	35	63,5	42	46	

OL7261 Riduzione a codolo premontato - (serie S)

Standpipe/Tube Reducers - (S series)







W.P.		part number (body only)	Ø tube		Dimensions			
			A	B				
bar			mm	mm	L_1	L_2	CH_1	
S	630	OL7261-01	8	6	44	29	17	
		OL7261-02	10	6	46,5	31,5	17	
		OL7261-03	10	8	49	34	17	
		OL7261-04	12	6	46,0	31,0	17	
		OL7261-05	12	8	48	33	17	
		OL7261-06	12	10	48,5	32,5	19	
		OL7261-07	14	6	50	35	17	
		OL7261-08	14	8	50,0	35,0	17	
		OL7261-09	14	10	51	35	19	
		OL7261-10	14	12	52,5	36,5	22	
		OL7261-11	16	6	51	36	17	
		OL7261-12	16	8	51,0	36,0	17	
		OL7261-13	16	10	52	36	19	
		OL7261-14	16	12	53,5	37,5	22	
		OL7261-15	16	14	57	39	24	
	400	OL7261-16	20	6	56,5	41,5	22	
		OL7261-17	20	8	57	42	22	
		OL7261-18	20	10	57,0	41,0	22	
		OL7261-19	20	12	57	41	22	
		OL7261-20	20	14	60,5	42,5	24	
S	400	OL7261-21	20	16	61	42	27	
		OL7261-22	25	6	59,0	44,0	27	
		OL7261-23	25	8	59	44	27	
		OL7261-24	25	10	59,5	43,5	27	
		OL7261-25	25	12	60	44	27	
		OL7261-26	25	14	63,0	45,0	27	
		OL7261-27	25	16	63	45	27	
		OL7261-28	25	20	68,0	46,5	32	
		OL7261-29	30	6	64	49	32	
		OL7261-30	30	8	63,5	48,5	32	
		OL7261-31	30	10	64	48	32	
		OL7261-32	30	12	64,0	48,0	32	
		OL7261-33	30	14	68	50	32	
		OL7261-34	30	16	67,5	49,0	32	
		OL7261-35	30	20	71	49	32	
		OL7261-36	30	25	75,5	51,5	41	
	315	OL7261-37	38	6	70	55	41	
		OL7261-38	38	8	69,5	54,5	41	
		OL7261-39	38	10	70	54	41	
		OL7261-40	38	12	70,0	54,0	41	
		OL7261-41	38	14	74	56	41	
		OL7261-42	38	16	73,5	55,0	41	
		OL7261-43	38	20	77	55	41	
		OL7261-44	38	25	79,5	55,5	41	
		OL7261-45	38	30	83	56	46	


OL7265 Girevole a gomito

Angular rotary fitting



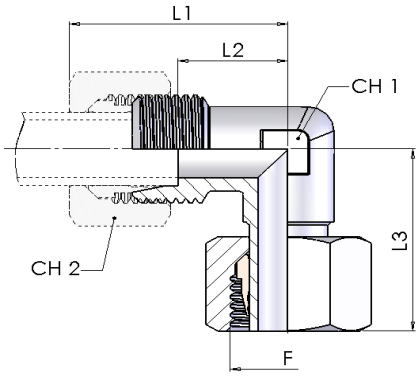

W.P.		part number (body only)	Ø tube	thread	Dimensions				
bar			mm	F	L_1	L_2	L_3	CH_1	CH_2
L	315	**OL7265-01**	6	M 12x1,5	27	12	26	12	14
		OL7265-02	8	M 14x1,5	29	14	27	12	17
		OL7265-03	10	M 16x1,5	30	15	28,5	14	19
		OL7265-04	12	M 18x1,5	32	17	29	17	22
		OL7265-05	15	M 22x1,5	36	21	32	19	27
		OL7265-06	18	M 26x1,5	40	23,5	35	24	32
	160	**OL7265-07**	22	M 30x2	44	27,5	38	27	36
		OL7265-08	28	M 36x2	47	30,5	41,5	36	41
		OL7265-09	35	M 45x2	56	34,5	51	41	50
		OL7265-10	42	M 52x2	63	40	56	50	60
S	630	**OL7265-11**	6	M 14x1,5	31	16	27	12	17
		OL7265-12	8	M 16x1,5	32	17	27	14	19
		OL7265-13	10	M 18x1,5	34	17,5	29,5	17	22
		OL7265-14	12	M 20x1,5	38	21,5	30,5	17	24
		OL7265-15	14	M 22x1,5	40	22	34,5	19	27
	400	**OL7265-16**	16	M 24x1,5	43	24,5	36	24	30
		OL7265-17	20	M 30x2	48	26,5	44	27	36
		OL7265-18	25	M 36x2	54	30	49,5	36	46
		OL7265-19	30	M 42x2	62	35,5	55	41	50
	315	**OL7265-20**	38	M 52x2	72	41	63	50	60





- su richiesta è disponibile la conbinazione girevole a gomito. Cod. OL7270

- swivel elbows are available on request. Code OL7270

OL7275 Raccordo Orientabile a gomito con O-Ring

Angular rotary fitting with O-Ring Seal




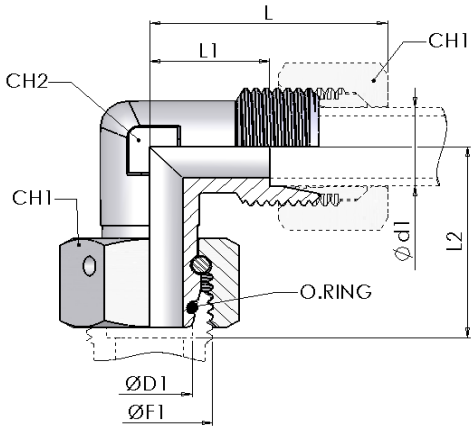

W.P.		part number (body only)	Ø tube	Dimensions						O-Ring*
bar			D1	L	L1	L2	ØF1	CH1	CH2	mm
L	315	OL7275-01	6	27	12,0	26	12x1,5	14	12	4x1,5
		OL7275-02	8	29	14,0	27,5	14x1,5	17	12	6x1,5
		OL7275-03	10	30	15,0	29	16x1,5	19	14	7,5x1,5
		OL7275-04	12	32	17,0	29,5	18x1,5	22	17	9x1,5
		OL7275-05	15	36	21,0	32,5	22x1,5	27	19	12x2
		OL7275-06	18	40	23,5	35,5	26x1,5	32	24	15x2
	160	OL7275-07	22	44	27,5	38,5	30x2	36	27	20x2
		OL7275-08	28	47	30,5	41,5	36x2	41	36	26x2
		OL7275-09	35	56	34,5	51	45x2	50	41	32x2,5
		OL7275-10	42	63	40,0	56	52x2	60	50	38x2,5
S	630	OL7275-11	6	31	16,0	27	14x1,5	17	12	4x1,5
		OL7275-12	8	32	17,0	27,5	16x1,5	19	14	6x1,5
		OL7275-13	10	34	17,5	30	18x1,5	22	17	7,5x1,5
		OL7275-14	12	38	21,5	31	20x1,5	24	17	9x1,5
		OL7275-15	14	40	22,0	35	22x1,5	27	19	10x2
	400	OL7275-16	16	43	24,5	36,5	24x1,5	30	24	12x2
		OL7275-17	20	48	26,5	44,5	30x2	36	27	16,3x2,4
		OL7275-18	25	54	30,0	50	36x2	46	36	20,3x2,4
		OL7275-19	30	62	35,5	55	42x2	50	41	25,3x2,4
	315	OL7275-20	38	72	41,0	63	52x2	60	50	33,3x2,4

* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35°a +100℃ - FPM (Viton): da -25°a +120℃

** - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35°to +100℃ - FPM (Viton): f rom -25°to +120℃*





- su richiesta è disponibile il raccordo combinato orientabile a gomito con O-Ring Cod. OL7280

- swivel elbows with o-ring seal are available on request. Code OL7280


OL7285 T CON DADO GIR. CENTR.

Rotary fitting a Tees



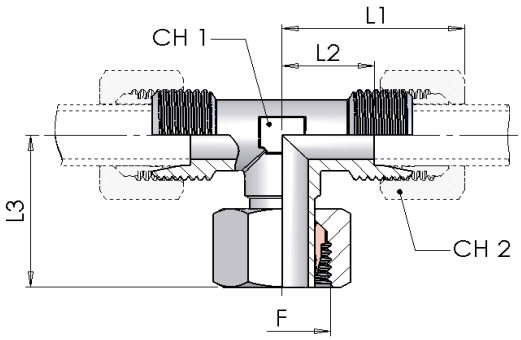

W.P.		part number (body only)	Ø tube	thread	Dimensions				
bar			mm	F	L_1	L_2	L_3	CH_1	CH_2
L	315	**OL7285-01**	6	M 12x1,5	27	12	26	12	14
		OL7285-02	8	M 14x1,5	29	14	27	12	17
		OL7285-03	10	M 16x1,5	30	15	28,5	14	19
		OL7285-04	12	M 18x1,5	32	17	29	17	22
		OL7285-05	15	M 22x1,5	36	21	32	19	27
		OL7285-06	18	M 26x1,5	40	23,5	35	24	32
	160	**OL7285-07**	22	M 30x2	44	27,5	38	27	36
		OL7285-08	28	M 36x2	47	30,5	41,5	36	41
		OL7285-09	35	M 45x2	56	34,5	51	41	50
		OL7285-10	42	M 52x2	63	40	56	50	60
S	630	**OL7285-11**	6	M 14x1,5	31	16	27	12	17
		OL7285-12	8	M 16x1,5	32	17	27	14	19
		OL7285-13	10	M 18x1,5	34	17,5	29,5	17	22
		OL7285-14	12	M 20x1,5	38	21,5	30,5	17	24
		OL7285-15	14	M 22x1,5	40	22	34,5	19	27
	400	**OL7285-16**	16	M 24X1,5	43	24,5	36	24	30
		OL7285-17	20	M 30X2	48	26,5	44	27	36
		OL7285-18	25	M 36X2	54	30	49,5	36	46
		OL7285-19	30	M 42X2	62	35,5	55	41	50
	315	**OL7285-20**	38	M 52X2	72	41	63	50	60





- su richiesta è disponibile la conbinazione girevole a T. Cod. OL7290

- swivel branch tees are available on request. Code OL7290

OL7295 T DADO CENTR. ORIENT. con O-Ring

Rotary fitting a Tees with O-Ring Seal




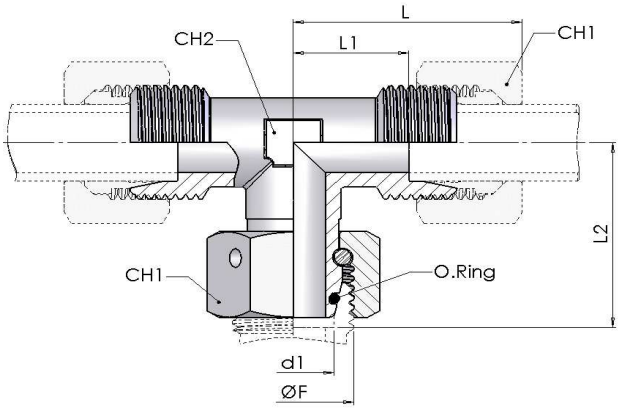

W.P.		part number (body only)	Ø tube	Dimensions						O-Ring*
bar			d1	L	L1	L2	ØF1	CH1	CH2	mm
L	315	OL7295-01	6	27	12,0	26	12x1,5	14	12	4x1,5
		OL7295-02	8	29	14,0	27,5	14x1,5	17	12	6x1,5
		OL7295-03	10	30	15,0	29	16x1,5	19	14	7,5x1,5
		OL7295-04	12	32	17,0	29,5	18x1,5	22	17	9x1,5
		OL7295-05	15	36	21,0	32,5	22x1,5	27	19	12x2
		OL7295-06	18	40	23,5	35,5	26x1,5	32	24	15x2
	160	OL7295-07	22	44	27,5	38,5	30x2	36	27	20x2
		OL7295-08	28	47	30,5	41,5	36x2	41	36	26x2
		OL7295-09	35	56	34,5	51	45x2	50	41	32x2,5
		OL7295-10	42	63	40,0	56	52x2	60	50	38x2,5
S	630	OL7295-11	6	31	16,0	27	14x1,5	17	12	4x1,5
		OL7295-12	8	32	17,0	27,5	16x1,5	19	14	6x1,5
		OL7295-13	10	34	17,5	30	18x1,5	22	17	7,5x1,5
		OL7295-14	12	38	21,5	31	20x1,5	24	17	9x1,5
		OL7295-15	14	40	22,0	35	22x1,5	27	19	10x2
	400	OL7295-16	16	43	24,5	36,5	24x1,5	30	24	12x2
		OL7295-17	20	48	26,5	44,5	30x2	36	27	16,3x2,4
		OL7295-18	25	54	30,0	50	36x2	46	36	20,3x2,4
		OL7295-19	30	62	35,5	55	42x2	50	41	25,3x2,4
	315	OL7295-20	38	72	41,0	63	52x2	60	50	33,3x2,4

* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35°a +100℃ - FPM (Viton): da -25°a +120℃

** - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35°to +100℃ - FPM (Viton): f rom -25°to +120℃*





- su richiesta è disponibile il raccordo combinato orientabile a tee con O-Ring Cod. OL7300

- swivel branch tees with o-ring seal are available on request. Code OL7300


OL7305 T CON DADO GIR. LATERALE

Rotary fitting a L



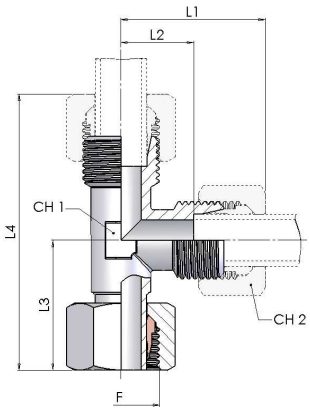

W.P.		part number (body only)	Ø tube	thread	Dimensions					
bar			mm	F	L_1	L_2	L_3	L_4	CH_1	CH_2
L	315	**OL7305-01**	6	M 12x1,5	27	12	26	53	12	14
		OL7305-02	8	M 14x1,5	29	14	27	56	12	17
		OL7305-03	10	M 16x1,5	30	15	28,5	58,5	14	19
		OL7305-04	12	M 18x1,5	32	17	29	61	17	22
		OL7305-05	15	M 22x1,5	36	21	32	68	19	27
		OL7305-06	18	M 26x1,5	40	23,5	35	75	24	32
	160	**OL7305-07**	22	M 30x2	44	27,5	38	82	27	36
		OL7305-08	28	M 36x2	47	30,5	41,5	88,5	36	41
		OL7305-09	35	M 45x2	56	34,5	51	107	41	50
		OL7305-10	42	M 52x2	63	40	56	119	50	60
S	630	**OL7305-11**	6	M 14x1,5	31	16	27	58	12	17
		OL7305-12	8	M 16x1,5	32	17	27	59	14	19
		OL7305-13	10	M 18x1,5	34	17,5	29,5	63,5	17	22
		OL7305-14	12	M 20X1,5	38	21,5	30,5	68,85	17	24
		OL7305-15	14	M 22X1,5	40	22	34,5	74,5	19	27
	400	**OL7305-16**	16	M 24X1,5	43	24,5	36	79	24	30
		OL7305-17	20	M 30X2	48	26,5	44	92	27	36
		OL7305-18	25	M 36X2	54	30	49,5	103,5	36	46
		OL7305-19	30	M 42X2	62	35,5	55	117	41	50
	315	**OL7305-20**	38	M 52X2	72	41	63	135	50	60




- su richiesta è disponibile la conbinazione girevole a L. Cod. OL7310

- swivel barrel tees are available on request. Code OL7310

OL7315 T CON DADO GIR. LAT. con O-Ring

L Rotary fitting with O-Ring Seal




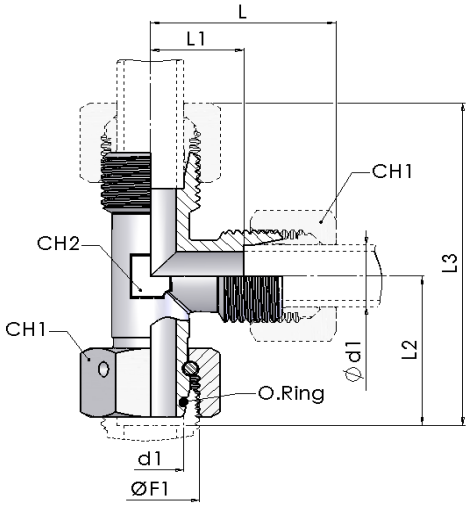

W.P.		part number (body only)	Ø tube	Dimensions							O-Ring*
bar			d1	L	L1	L2	L3	ØF1	CH1	CH2	mm
L	315	OL7315-01	6	27	12,0	26	53	12x1,5	14	12	4x1,5
		OL7315-02	8	29	14,0	27,5	56	14x1,5	17	12	6x1,5
		OL7315-03	10	30	15,0	29	59	16x1,5	19	14	7,5x1,5
		OL7315-04	12	32	17,0	29,5	61	18x1,5	22	17	9x1,5
		OL7315-05	15	36	21,0	32,5	69	22x1,5	27	19	12x2
		OL7315-06	18	40	23,5	35,5	75	26x1,5	32	24	15x2
	160	OL7315-07	22	44	27,5	38,5	82	30x2	36	27	20x2
		OL7315-08	28	47	30,5	41,5	89	36x2	41	36	26x2
		OL7315-09	35	56	34,5	51	107	45x2	50	41	32x2,5
		OL7315-10	42	63	40,0	56	119	52x2	60	50	38x2,5
S	630	OL7315-11	6	31	16,0	27	58	14x1,5	17	12	4x1,5
		OL7315-12	8	32	17,0	27,5	59	16x1,5	19	14	6x1,5
		OL7315-13	10	34	17,5	30	64	18x1,5	22	17	7,5x1,5
		OL7315-14	12	38	21,5	31	69	20x1,5	24	17	9x1,5
		OL7315-15	14	40	22,0	35	75	22x1,5	27	19	10x2
	400	OL7315-16	16	43	24,5	36,5	79	24x1,5	30	24	12x2
		OL7315-17	20	48	26,5	44,5	93	30x2	36	27	16,3x2,4
		OL7315-18	25	54	30,0	50	104	36x2	46	36	20,3x2,4
		OL7315-19	30	62	35,5	55	117	42x2	50	41	25,3x2,4
	315	OL7315-20	38	72	41,0	63	135	52x2	60	50	33,3x2,4

* - Gamma di temperature senza riduzioni di pressione con i raccordi con guarnizioni O-Ring in NBR (di serie) e FPM (su richiesta): NBR (Perbunan): da -35°a +100℃ - FPM (Viton): da -25°a +120℃

** - Temperature range without pressure reductions with connections fitted with O-Ring in NBR (standard) and FPM (to order): NBR(Perbunan): from -35°to +100℃ - FPM (Viton): f rom -25°to +120℃*



- su richiesta è disponibile il raccordo combinato orientabile a L con O-Ring Cod. OL7320

- swivel barrel tees with o-ring seal are available on request. Code OL7320


Adattatori DIN2353 / DIN2353 Adaptors


OL7325

OL7326

TERMINALE Gomito ORIENT.

Orientable Banjos elbows



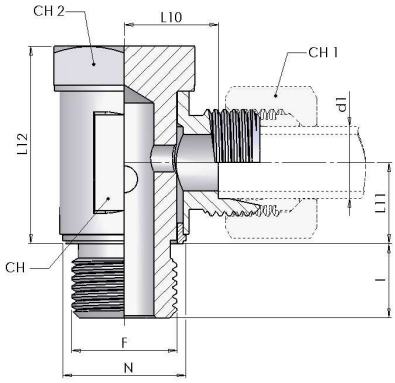

Filettatura / Thread:
BSPP


W.P.		part number (body only)	Ø tube	Dimensions								
bar			d1	I	L10	L11	L12	N	CH1	CH2	CH	F
L	315	OL7325-01	6	6	12,0	10	22	14	14	14	18	1/8"
		OL7325-02	8	12	14,0	16	30,5	18	17	19	22	1/4"
		OL7325-03	10	12	15,0	16	30,5	18	19	19	22	1/4"
		OL7325-04	12	12	17,5	18	38,5	22	22	24	30	3/8"
		OL7325-05	15	14	21,0	20	44,5	26	27	27	32	1/2"
		OL7325-06	18	14	20,5	20	44,5	26	32	27	32	1/2"
	160	OL7325-07	22	16	24,5	24	53	32	36	32	41	3/4"
		OL7325-08	28	18	29,5	29	64	44	41	41	52	1"
		OL7325-09	35	20	35,5	36	79	49	50	50	62	1" 1/4
		OL7325-10	42	22	40,0	42	90	55	60	55	70	1" 1/2
S	400	OL7325-11	6	12	16,0	16	30,5	18	17	19	22	1/4"
		OL7325-12	8	12	16,0	16	30,5	18	19	19	22	1/4"
		OL7325-13	10	12	18,0	18	38,5	22	22	24	30	3/8"
		OL7325-14	12	12	18,0	18	38,5	22	24	24	30	3/8"
		OL7325-15	14	14	24,0	21	45,5	26	27	27	36	1/2"
		OL7325-16	16	14	23,5	21	45,5	26	30	27	36	1/2"
		OL7325-17	20	16	28,5	28	61	32	36	32	41	3/4"
	250	OL7325-18	25	18	31,0	31	68	39	46	41	52	1"
		OL7325-19	30	20	36,5	37	79	49	50	50	62	1" 1/4
		OL7325-20	38	22	41,0	42	90	55	60	55	70	1" 1/2

Filettatura / Thread:
Metric

W.P.		part number (body only)	Ø tube	Dimensions								
bar			d1	I	L10	L11	L12	N	CH1	CH2	CH	F
L	315	OL7326-01	6	6	12,0	10,0	22	14	14	14	18	10x1
		OL7326-02	8	12	13,0	14,5	29,5	17	17	17	20	12x1,5
		OL7326-03	10	12	15,0	15,5	30,5	18	19	19	22	14x1,5
		OL7326-04	12	12	17,5	18,0	38,5	22	22	24	30	16x1,5
		OL7326-05	15	14	21,0	20,0	42,5	22	27	24	32	18x1,5
		OL7326-06	18	14	22,5	20,5	45,5	26	32	27	36	22x1,5
	160	OL7326-07	22	16	22,0	24,0	53	32	36	32	41	26x1,5
		OL7326-08	28	18	29,5	29,0	64	44	41	41	52	33x2
		OL7326-09	35	20	35,5	36,0	79	49	50	50	62	42x2
		OL7326-10	42	22	40,0	41,0	90	55	60	55	70	48x2
S	400	OL7326-11	6	12	15,0	14,5	29,5	17	17	17	20	12x1,5
		OL7326-12	8	12	16,0	15,5	30,5	18	19	19	22	14x1,5
		OL7326-13	10	12	18,0	18,0	38,5	22	22	24	30	16x1,5
		OL7326-14	12	12	19,5	19,5	42,5	22	24	24	30	18x1,5
		OL7326-15	14	14	24,0	20,5	45,5	26	27	27	36	20x1,5
		OL7326-16	16	14	23,5	22,5	48,5	26	30	27	36	22x1,5
		OL7326-17	20	16	28,5	28,5	61	32	36	32	41	27x2
	250	OL7326-18	25	18	31,0	31,0	68	39	46	41	52	33x2
		OL7326-19	30	20	36,5	36,0	79	49	50	50	62	42x2
		OL7326-20	38	22	41,0	41,0	90	55	60	55	70	48x2

OL7330 TERMINALE Gomito Orient. con guarnizione

Orientable Banjo elbows with seal ring

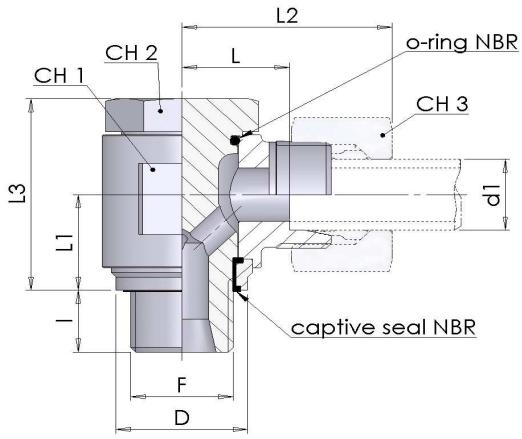


Filettatura / Thread: Metric

W.P.		part number (body only)	Ø tube	Dimensions									
bar			d1	CH1	CH2	CH3	I	F	D	L	L1	L2	L3
L	315	**OL7330-01**	06	17	14	14	08	G1/8A	14,9	13,0	10	27,5	21,0
		OL7330-02	06	22	19	14	10	G1/4A	18,9	15,0	13,5	29,5	27,0
		OL7330-03	08	22	19	17	10	G1/4A	18,9	14,0	13,5	28,5	27,0
		OL7330-04	10	22	19	19	10	G1/4A	18,9	16,0	13,5	30,5	27,0
		OL7330-05	12	22	19	22	10	G1/4A	18,9	16,0	15,5	31,0	30,0
		OL7330-06	12	27	22	22	12	G3/8A	21,8	18,0	16	32,5	32,5
		OL7330-07	15	32	27	27	14	G1/2A	26,9	21,5	19,5	36,0	41,0
		OL7330-08	18	32	27	32	14	G1/2A	26,9	21,0	21,5	37,0	43,0
	160	**OL7330-09**	22	41	32	36	16	G3/4A	32,9	27,5	24	43,5	48,0
		OL7330-10	28	46	41	41	18	G1A	39,9	31,5	30,5	48,0	59,0
		OL7330-11	35	55	50	50	20	G1 1/4A	49,8	35,5	35,5	57,0	70,0
		OL7330-12	42	65	55	60	22	G1 1/2A	55,8	40,0	40,5	62,5	80,0
S	400	**OL7330-13**	06	22	19	17	10	G1/4A	18,9	16,0	13,5	30,5	27,0
		OL7330-14	08	22	19	19	10	G1/4A	18,9	16,0	13,5	30,5	27,0
		OL7330-15	10	27	22	22	12	G3/8A	21,8	18,5	16	34,5	32,5
		OL7330-16	12	27	22	24	11	G3/8A	21,8	18,5	17	35,0	33,5
	315	**OL7330-17**	16	30	27	32	14	G1/2A	26,9	22,0	21,5	40,0	43,0
	250	**OL7330-18**	20	41	32	36	16	G3/4A	32,9	27,0	24	48,5	48,0
	160	**OL7330-19**	25	46	41	46	18	G1A	39,9	31,0	30,5	55,0	59,0
		OL7330-20	30	55	50	50	20	G1 1/4A	49,8	36,5	35,5	63,0	70,0
		OL7330-21	38	65	55	60	22	G1 1/2A	55,8	41,0	40,5	71,5	80,0

OL7331 TERMINALE Gomito Orient. con guarnizione

Orientable Banjo elbows with seal ring

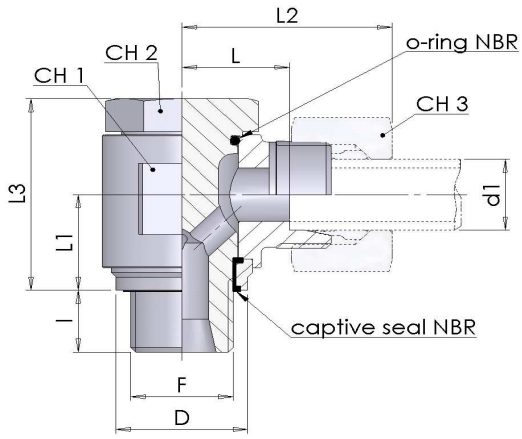


Filettatura / Thread: Metric

W.P.		part number (body only)	Ø tube	Dimensions									
bar			d1	CH1	CH2	CH3	I	F	D	L	L1	L2	L3
L	315	**OL7331-01**	06	17	14	14	8	M10x1	14,9	13,0	10	27,5	21,0
		OL7331-02	08	22	19	17	10	M12x1,5	17,9	14,0	13,5	28,5	27,0
		OL7331-03	10	22	19	19	10	M14x1,5	19,9	16,0	13,5	30,5	27,0
		OL7331-04	12	27	22	22	11	M16x1,5	21,8	18,0	16	32,5	32,5
	250	**OL7331-05**	12	24	22	22	10	M18x1,5	23,8	20,0	18,5	35,0	35,5
	315	**OL7331-06**	15	30	24	27	10	M18x1,5	23,9	20,5	18,5	35,5	37,0
		OL7331-07	18	32	27	32	12	M22x1,5	27,9	21,0	21,5	37,0	43,0
	160	**OL7331-08**	22	41	32	36	16	M26x1,5	31,9	27,5	24	43,5	48,0
		OL7331-09	28	46	41	41	18	M33x2	39,9	31,5	30,5	48,0	59,0
		OL7331-10	35	55	50	50	20	M42x2	49,8	35,5	35,5	57,0	70,0
		OL7331-11	42	65	55	60	22	M48x2	55,8	40,0	40,5	62,5	80,0
S	400	**OL7331-12**	06	22	19	17	10	M12x1,5	17,9	16,0	13,5	30,5	27,0
		OL7331-13	08	22	19	19	10	M14x1,5	19,9	16,0	13,5	30,5	27,0
		OL7331-14	10	27	22	22	11	M16x1,5	21,8	18,5	16	34,5	32,5
		OL7331-15	12	30	24	24	10	M18x1,5	23,9	19,5	18,5	35,5	37,0
	315	**OL7331-16**	16	32	27	30	12	M22x1,5	27,9	22,0	21,5	40,0	43,0
	250	**OL7331-17**	20	41	32	36	16	M27x2	32,9	27,0	24	48,5	48,0
	160	**OL7331-18**	25	46	42	46	18	M33x2	39,9	31,0	30,5	55,0	59,0
		OL7331-19	30	55	50	50	20	M42x2	49,8	36,5	35,5	63,0	70,0
		OL7331-20	38	65	55	60	22	M48x2	55,8	41,0	40,5	71,5	80,0

OL7335 Raccordo Orient. Doppio con guarniz.

Double orientable fitting with O-Ring

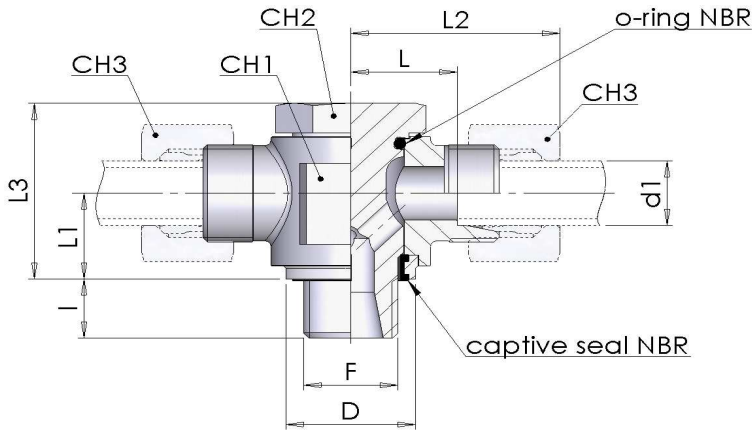


Filettatura / Thread: Metric

W.P.		part number (body only)	Ø tube	Dimensions									
bar			d1	CH1	CH2	CH3	I	F	D	L	L1	L2	L3
L	315	**OL7335-01**	06	17	14	14	08	G1/8A	14,9	13,0	10	27,5	21,0
		OL7335-02	06	22	19	14	10	G1/4A	18,9	15,0	13,5	29,5	27,0
		OL7335-03	08	22	19	17	10	G1/4A	18,9	14,0	13,5	28,5	27,0
		OL7335-04	10	22	19	19	10	G1/4A	18,9	16,0	13,5	30,5	27,0
		OL7335-05	12	22	19	22	10	G1/4A	18,9	16,0	15,5	31,0	30,0
		OL7335-06	12	27	22	22	12	G3/8A	21,8	18,0	16	32,5	32,5
		OL7335-07	15	32	27	27	14	G1/2A	26,9	21,5	19,5	36,0	41,0
		OL7335-08	18	32	27	32	14	G1/2A	26,9	21,0	21,5	37,0	43,0
	160	**OL7335-09**	22	41	32	36	16	G3/4A	32,9	27,5	24	43,5	48,0
		OL7335-10	28	46	41	41	18	G1A	39,9	31,5	30,5	48,0	59,0
		OL7335-11	35	55	50	50	20	G1 1/4A	49,8	35,5	35,5	57,0	70,0
		OL7335-12	42	65	55	60	22	G1 1/2A	55,8	40,0	40,5	62,5	80,0
S	400	**OL7335-13**	06	22	19	17	10	G1/4A	18,9	16,0	13,5	30,5	27,0
		OL7335-14	08	22	19	19	10	G1/4A	18,9	16,0	13,5	30,5	27,0
		OL7335-15	10	27	22	22	12	G3/8A	21,8	18,5	16	34,5	32,5
		OL7335-16	12	27	22	24	11	G3/8A	21,8	18,5	17	35,0	33,5
	315	**OL7335-17**	16	30	27	32	14	G1/2A	26,9	22,0	21,5	40,0	43,0
	250	**OL7335-18**	20	41	32	36	16	G3/4A	32,9	27,0	24	48,5	48,0
	160	**OL7335-19**	25	46	41	46	18	G1A	39,9	31,0	30,5	55,0	59,0
		OL7335-20	30	55	50	50	20	G1 1/4A	49,8	36,5	35,5	63,0	70,0
		OL7335-21	38	65	55	60	22	G1 1/2A	55,8	41,0	40,5	71,5	80,0

OL7336 Raccordo Orient. Doppio con guarniz.

Double orientable fitting with O-Ring

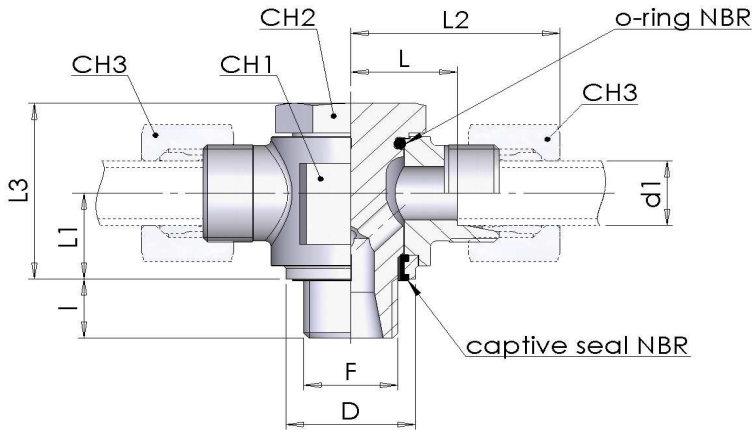



Filettatura / Thread: Metric

W.P.		part number (body only)	Ø tube	Dimensions									
bar			d1	CH1	CH2	CH3	I	F	D	L	L1	L2	L3
L	315	**OL7336-01**	06	17	17	14	8	M10x1	14,9	13,0	10	27,5	21,0
		OL7336-02	08	22	22	17	10	M12x1,5	17,9	14,0	13,5	28,5	27,0
		OL7336-03	10	22	22	19	10	M14x1,5	19,9	16,0	13,5	30,5	27,0
		OL7336-04	12	27	27	22	11	M16x1,5	21,8	18,0	16	32,5	32,5
	250	**OL7336-05**	12	24	24	22	10	M18x1,5	23,8	20,0	18,5	35,0	35,5
	315	**OL7336-06**	15	30	30	27	10	M18x1,5	23,9	20,5	18,5	35,5	37,0
		OL7336-07	18	32	32	32	12	M22x1,5	27,9	21,0	21,5	37,0	43,0
	160	**OL7336-08**	22	41	41	36	16	M26x1,5	31,9	27,5	24	43,5	48,0
		OL7336-09	28	46	46	41	18	M33x2	39,9	31,5	30,5	48,0	59,0
		OL7336-10	35	55	55	50	20	M42x2	49,8	35,5	35,5	57,0	70,0
		OL7336-11	42	65	65	60	22	M48x2	55,8	40,0	40,5	62,5	80,0
S	400	**OL7336-12**	06	22	22	17	10	M12x1,5	17,9	16,0	13,5	30,5	27,0
		OL7336-13	08	22	22	19	10	M14x1,5	19,9	16,0	13,5	30,5	27,0
		OL7336-14	10	27	27	22	11	M16x1,5	21,8	18,5	16	34,5	32,5
		OL7336-15	12	30	30	24	10	M18x1,5	23,9	19,5	18,5	35,5	37,0
	315	**OL7336-16**	16	32	32	30	12	M22x1,5	27,9	22,0	21,5	40,0	43,0
	250	**OL7336-17**	20	41	41	36	16	M27x2	32,9	27,0	24	48,5	48,0
	160	**OL7336-18**	25	46	46	46	18	M33x2	39,9	31,0	30,5	55,0	59,0
		OL7336-19	30	55	55	50	20	M42x2	49,8	36,5	35,5	63,0	70,0
		OL7336-20	38	65	65	60	22	M48x2	55,8	41,0	40,5	71,5	80,0

OL7340 Rid. Maschio-Femm. con guarn. Piana

Male-Female reducing coupling with flat gasket





Filettatura / Thread:
BSPP (Form E DIN 3852)


Tipo A


W.P.	part number	thread		Dimensions				Tipo
bar		F_2	F_1	L	L_1	Ø D	CH	
630	**OL7340-01**	G 3/8	G 1/8	22,5	12	22	22	**A**
	OL7340-02	G 1/2	G 1/8	24	14	26	27	**A**
	OL7340-03	G 1/2	G 1/4	24	14	26	27	**A**
400	**OL7340-04**	G 3/4	G 1/4	26	16	32	32	**A**
	OL7340-05	G 3/4	G 3/8	26	16	32	32	**A**
	OL7340-06	G 1	G 1/4	29	18	39	41	**A**
	OL7340-07	G 1	G 3/8	29	18	39	41	**A**
	OL7340-08	G 1	G 1/2	29	18	39	41	**A**
250	**OL7340-09**	G 1 1/4	G 1/2	32	20	49	50	**A**
	OL7340-10	G 1 1/4	G 3/4	32	20	49	50	**A**
	OL7340-11	G 1 1/2	G 1/2	36	22	55	55	**A**
	OL7340-12	G 1 1/2	G 3/4	36	22	55	55	**A**
	OL7340-13	G 1 1/2	G 1	36	22	55	55	**A**

OL7345 Riduzione Maschio-Femmina con guarnizione piana

Male / Female Stud AdaptorsPacking ring

Tipo B



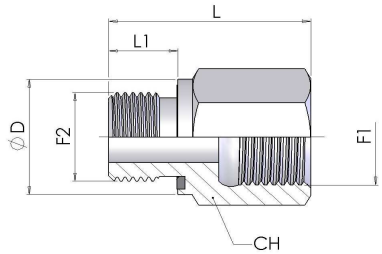



Filettatura / Thread:
BSPP (Form E DIN 3852)

W.P.	part number	thread		Dimensions				Tipo
bar		F2	F1	L	L1	ØD	CH	
630	**OL7345-01**	G 1/8	G 1/4	31	8	14	19	**B**
	OL7345-02	G 1/8	G 3/8	32	8	14	24	**B**
	OL7345-03	G 1/4	G 1/8	28	12	18	19	**B**
	OL7345-04	G 1/4	G 3/8	36	12	18	24	**B**
	OL7345-05	G 1/4	G 1/2	40	12	18	30	**B**
400	**OL7345-06**	G 1/4	G 3/4	43	12	18	36	**B**
630	**OL7345-07**	G 3/8	G 1/4	36	12	22	22	**B**
	OL7345-08	G 3/8	G 1/2	41	12	22	30	**B**
400	**OL7345-09**	G 3/8	G 3/4	44	12	22	36	**B**
	OL7345-10	G 1/2	G 3/8	36	14	26	27	**B**
	OL7345-11	G 1/2	G 3/4	46	14	26	36	**B**
	OL7345-12	G 1/2	G 1	49	14	26	41	**B**
250	**OL7345-13**	G 1/2	G 1 1/4	53	14	26	55	**B**
400	**OL7345-14**	G 3/4	G 1/2	41	16	32	32	**B**
	OL7345-15	G 3/4	G 1	51	16	32	41	**B**
250	**OL7345-16**	G 3/4	G 1 1/4	55	16	32	55	**B**
	OL7345-17	G 3/4	G 1 1/2	57	16	32	60	**B**
400	**OL7345-18**	G 1	G 3/4	47	18	39	41	**B**
250	**OL7345-19**	G 1	G 1 1/4	57	18	39	55	**B**
	OL7345-20	G 1	G 1 1/2	59	18	39	60	**B**
	OL7345-21	G 1 1/4	G 1	52	20	49	50	**B**
	OL7345-22	G 1 1/4	G 1 1/2	60	20	49	60	**B**
	OL7345-23	G 1 1/2	G 1 1/4	58	22	55	55	**B**

OL7350 Portamanometro

Gauge Couplings



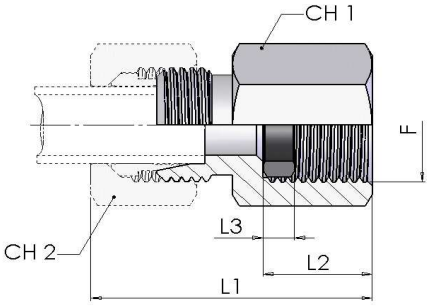


W.P.		part number (body only)	Ø tube	thread	Dimensions				
bar			mm	F	L_1	L_2	L_3	CH_1	CH_2
LL	100	**OL7350-01**	4	G 1/4	33	14,5	4,5	19	10
L	315	**OL7350-02**	6	G 1/4	37	14,5	4,5	19	14
		OL7350-03	8	G 1/4	37	14,5	4,5	19	17
		OL7350-04	10	G 1/4	38	14,5	4,5	19	19
		OL7350-05	12	G 1/4	38	14,5	4,5	19	22
S	630	**OL7350-06**	6	G 1/2	46	20	5	27	17
		OL7350-07	8	G 1/2	46	20	5	27	19
		OL7350-08	10	G 1/2	47	20	5	27	22
		OL7350-09	12	G 1/2	47	20	5	27	24


Adattatori DIN2353 / DIN2353 Adaptors

OL7355
OL7356

Terminale diritto femmina

Female Stud Couplings



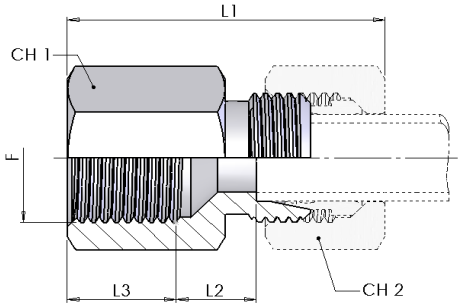

Filettatura / Thread:
BSPP


W.P.		part number (body only)	Ø tube	thread	Dimensions				
bar			mm	F	L1	L2	L3	CH1	CH2
L	315	OL7355-01	6	G 1/8	33,5	7	12	14	14
		OL7355-02	8	G 1/4	39	7	17	19	17
		OL7355-03	8	G 3/8	40	10,5	14,5	24	17
		OL7355-04	8	G 1/2	44	14,5	14,5	27	17
		OL7355-05	10	G 1/4	40	8	17	19	19
		OL7355-06	10	G 3/8	41	11,5	14,5	24	19
		OL7355-07	10	G 1/2	45	15,5	14,5	27	19
		OL7355-08	12	G 3/8	40,5	9	17	24	22
		OL7355-09	12	G 1/2	45	15,5	14,5	27	22
		OL7355-10	15	G 1/2	46	11	20	27	27
		OL7355-11	18	G 1/2	47	10,5	20	27	32
	160	OL7355-12	22	G 3/4	52	13,5	22	36	36
		OL7355-13	28	G 1	54	13	24,5	41	41
		OL7355-14	35	G 1 1/4	63	15	26,5	55	50
		OL7355-15	42	G 1 1/2	66	14,5	28,5	60	60
S	630	OL7355-16	6	G 1/4	41	9	17	19	17
		OL7355-17	8	G 1/4	41	9	17	19	19
		OL7355-18	10	G 3/8	42,5	9,5	17	24	22
		OL7355-19	12	G 3/8	42,5	9,5	17	24	24
		OL7355-20	14	G 1/2	50	12	20	30	27
	400	OL7355-21	16	G 1/2	50	11,5	20	30	30
		OL7355-22	20	G 3/4	56	12,5	22	36	36
		OL7355-23	25	G 1	61	12,5	24,5	41	46
		OL7355-24	30	G 1 1/4	69	16	26,5	55	50
	315	OL7355-25	38	G 1 1/2	75	15,5	28,5	60	60


Filettatura / Thread:
Metric

W.P.		part number (body only)	Ø tube	thread	Dimensions				
bar			mm	F	L1	L2	L3	CH1	CH2
L	315	OL7356-01	6	M 10x1	33,5	7	12	14	14
		OL7356-02	8	M 12x1,5	39	7	17	17	17
		OL7356-03	10	M 14x1,5	40	8	17	19	19
		OL7356-04	12	M 16x1,5	40,5	9	17	22	22
		OL7356-05	15	M 18x1,5	46	14	17	24	27
		OL7356-06	18	M 22x1,5	47	11,5	19	30	30
	160	OL7356-07	22	M 26x1,5	51	13,5	21	32	36
S	630	OL7356-08	6	M 12x1,5	41	9	17	17	17
		OL7356-09	8	M 14x1,5	41	9	17	19	19
		OL7356-10	10	M 16x1,5	42,5	9,5	17	22	22
		OL7356-11	12	M 18x1,5	42,5	9,5	17	24	24
		OL7356-12	14	M 20x1,5	50	13	19	27	27
	400	OL7356-13	16	M 22x1,5	50	12,5	19	30	30
		OL7356-14	20	M 27x2	56	12,5	22	36	36

OL7360 Anello di rinforzo

Pipe inserts






Materiale: Ottone
Material: *Brass*


part number	Ø Ester. X Spess.	Ø Int. Tubo	Dimensions			
			Ød	Ød1	L	
OL7360-01	6 x 1	4	2,6	3,8	15,5	
OL7360-02	6 x 0,5	5	3,6	4,8	12,5	
OL7360-03	8 x 1	6	4,6	5,8	15,5	
OL7360-04	10 x 1,5	7	5,6	6,8	17	
OL7360-05	10 x 1	8	6,6	7,8	16,5	
OL7360-06	12 x 1,5	9	7,6	8,8	16,5	
OL7360-07	12 x 1	10	8,6	9,8	16,5	
OL7360-08	15 x 1,5	12	10,2	11,8	17	
OL7360-09	15 x 1	13	11,2	12,8	17	
OL7360-10	18 x 1,5	15	13,2	14,8	17,5	
OL7360-11	18 x 1	16	14,2	15,8	17,5	
OL7360-12	20 x 1	18	16,2	17,8	22	
OL7360-13	22 x 1,5	19	17,2	18,8	18	
OL7360-14	22 x 1	20	18,2	19,8	18	
OL7360-15	25 x 1,5	22	20,2	21,8	23,5	
OL7360-16	28 x 2	24	22,2	23,8	18	
OL7360-17	28 x 1,5	25	23,2	24,8	18	
OL7360-18	35 x 2	31	28,8	30,8	22,5	
OL7360-19	42 x 2	38	35,8	37,8	23,5	


OL2605
OL2655

Tappo esagono incassato con guarnizione piana

Inner hexagon plugPacking ring







Filettatura / Thread:
BSPP (Form E DIN 3852)


W.P.	part number	thread	Dimensions			
bar		F	L	L1	D	CH
400	**OL2605-01**	**G 1/8**	12	8	14	5
	OL2605-02	**G 1/4**	17	12	19	6
	OL2605-03	**G 3/8**	17	12	22	8
	OL2605-04	**G 1/2**	19	14	27	10
	OL2605-06	**G 3/4**	21	16	32	12
	OL2605-07	**G 1**	22,5	16	40	17
250	**OL2605-08**	**G 1 1/4**	22,5	16	50	22
	OL2605-09	**G 1 1/2**	22,5	16	55	24


Filettatura / Thread:
Metric (Form E DIN 3852)

W.P.	part number	thread	Dimensions			
bar		F	L	L1	D	CH
400	**OL2655-01**	**M 10x1**	12	8	14	5
	OL2655-02	**M 12x1,5**	17	12	17	6
	OL2655-03	**M 14x1,5**	17	12	19	6
	OL2655-04	**M 16x1,5**	17	12	22	8
	OL2655-05	**M 18x1,5**	17	12	24	8
	OL2655-06	**M 20x1,5**	19	14	26	10
	OL2655-07	**M 22x1,5**	19	14	27	10
	OL2655-08	**M 26x1,5**	21	16	32	12
	OL2655-09	**M 27x2**	21	16	32	12
	OL2655-10	**M 33x2**	22,5	16	40	17
250	**OL2655-11**	**M 42x2**	22,5	16	50	22
	OL2655-12	**M 48x2**	22,5	16	55	24

OL2690 Tappo di chiusura tubi

Pipe plug






W.P.		part number (body only)	Ø Tube	Dimensions				
bar			d1	L	L1	CH1	CH2	
L	315	OL2690-01	6	22	17,5	14	12	
		OL2690-02	8	23	18,5	17	14	
		OL2690-03	10	24	19,5	19	17	
		OL2690-04	12	25	10,5	22	19	
		OL2690-05	15	26	11,5	27	24	
		OL2690-06	18	28	11,5	32	27	
	160	OL2690-07	22	30	13,5	36	32	
		OL2690-08	28	31	14,5	41	41	
		OL2690-09	35	36	14,5	50	46	
		OL2690-10	42	39	16,5	60	55	
S	630	OL2690-11	6	26	11,5	17	14	
		OL2690-12	8	28	13,5	19	17	
		OL2690-13	10	29	12,5	22	19	
		OL2690-14	12	31	14,5	24	22	
		OL2690-15	14	34	16,5	27	24	
	400	OL2690-16	16	34	15,5	30	27	
		OL2690-17	20	39	17,5	36	32	
		OL2690-18	25	44	20,5	46	41	
		OL2690-19	30	47	20,5	50	46	
	315	OL2690-20	38	54	23,5	60	55	

OL2695 Tappo Tubico con O-Ring

Pipe plug with O-Ring seal






W.P.		part number	Ø tube	Dimensions		O-Ring
bar			mm	A	L	mm
L	315	**OL2695-01**	6	6	18,5	4 x 1,5
		OL2695-02	8	8	18,5	6 x 1,5
		OL2695-03	10	10	20	7,5 x 1,5
		OL2695-04	12	12	20,5	9 x 1,5
		OL2695-05	15	15	20,5	12 x 2
		OL2695-06	18	18	22,5	15 x 2
	160	**OL2695-07**	22	22	25	20 x 2
		OL2695-08	28	28	25,5	26 x 2
		OL2695-09	35	35	30	32 x 2,5
		OL2695-10	42	42	30	38 x 2,5
S	630	**OL2695-11**	14	14	22,5	10 x 2
	400	**OL2695-12**	16	16	23,5	12 x 2
		OL2695-13	20	20	28,5	16,3 x 2,4
		OL2695-14	25	25	29	20 x 2,4
		OL2695-15	30	30	30,5	25,3 x 2,4
	315	**OL2695-16**	38	38	33	33,3 x 2,4

OL7365 Ogiva a saldare con O-Ring

Welding Nipples with O-Ring Seal




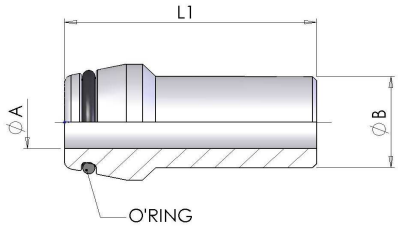


W.P.		part number	Ø tube	Pipe x Thickness	Dimensions			O-Ring
bar			mm	mm	ØA	ØB	L1	mm
S	630	**OL7365-01**	10	10 x 2	6	10	31	7,5 x 1,5
		OL7365-02	12	12 x 2,5	7	12	31	9 x 1,5
		OL7365-03	14	14 x 3	8	14	40	10 x 2
	400	**OL7365-04**	16	16 x 3	10	16	42	12 x 2
		OL7365-05	20	20 x 4	12	20	48	16,3 x 2,4
		OL7365-06	25	25 x 4	17	25	51	20,3 x 2,4
		OL7365-07	30	30 x 5	20	30	59	25,3 x 2,4
	315	**OL7365-08**	38	38 x 6	26	38	66	33,3 x 2,4

OL7370 Terminale diritto a saldare

Welding Bosses




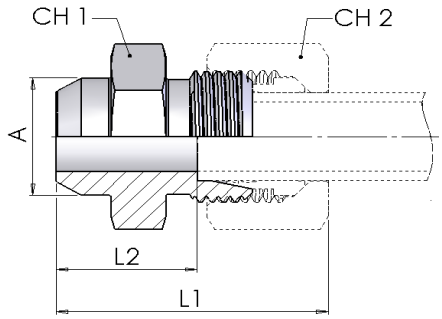


W.P.		part number (body only)	Ø tube	A	Dimensions			
bar			mm	mm	L_1	L_2	CH_1	CH_2
L	315	OL7370-01	6	10	29	14	12	14
		OL7370-02	8	12	31	16	14	17
		OL7370-03	10	14	33	18	17	19
		OL7370-04	12	16	33	18	19	22
		OL7370-05	15	19	37	22	22	27
		OL7370-06	18	22	40	23,5	27	32
	160	OL7370-07	22	27	45	28,5	32	36
		OL7370-08	28	32	47	30,5	41	41
		OL7370-09	35	40	54	32,5	46	50
		OL7370-10	42	46	58	35	55	60
S	630	OL7370-11	6	11	34	19	14	17
		OL7370-12	8	13	36	21	17	19
		OL7370-13	10	15	39	22,5	19	22
		OL7370-14	12	17	41	24,5	22	24
		OL7370-15	14	19	45	27	24	27
	400	OL7370-16	16	21	45	26,5	27	30
		OL7370-17	20	26	51	29,5	32	36
		OL7370-18	25	31	56	32	41	46
		OL7370-19	30	36	62	35,5	46	50
	315	OL7370-20	38	44	69	38	55	60

OL7375 Passaparatia a saldare

Welding Bulkhead Connections




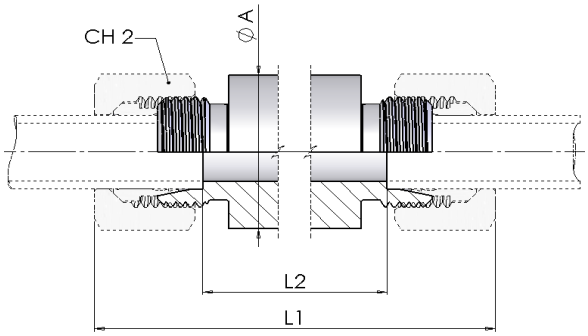

W.P.		part number (body only)	Ø tube	ØA	Dimensions		
bar			mm	mm	L_1	L_2	CH_2
L	315	**OL7375-01**	6	18	85	56	14
		OL7375-02	8	20	85	56	17
		OL7375-03	10	22	87	58	19
		OL7375-04	12	25	87	58	22
		OL7375-05	15	28	100	70	27
		OL7375-06	18	32	101	69	32
	160	**OL7375-07**	22	36	105	73	36
		OL7375-08	28	40	106	73	41
		OL7375-09	35	50	114	71	50
		OL7375-10	42	60	115	70	60
S	630	**OL7375-11**	6	20	89	60	17
		OL7375-12	8	22	89	60	19
		OL7375-13	10	25	91	59	22
		OL7375-14	12	28	91	59	24
		OL7375-15	14	30	107	72	27
	400	**OL7375-16**	16	35	107	71	30
		OL7375-17	20	38	114	71	36
		OL7375-18	25	45	120	72	46
		OL7375-19	30	50	126	73	50
	315	**OL7375-20**	38	60	133	72	60

OL7380 Valvole di Ritegno

Non-return valves

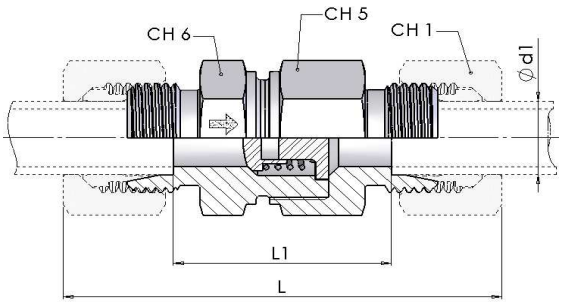

Pressione di Apertura 1 Bar ± 20%
Opening pressure 1 BAR ± 20%


W.P.		part number (body only)	Ø tube	Dimensions					
bar			d1	L	L_1	CH_1	CH_5	CH_6	
L	250	OL7380-01	6	58	29,0	14	17	17	
		OL7380-02	8	59	30,0	17	19	19	
		OL7380-03	10	69,5	40,5	19	24	22	
		OL7380-04	12	72,5	43,5	22	30	27	
		OL7380-05	15	77,5	47,5	27	32	27	
	160	OL7380-06	18	83,5	51,5	32	36	36	
		OL7380-07	22	93,5	61,5	36	46	41	
	100	OL7380-08	28	102,5	69,5	41	55	50	
		OL7380-09	35	117,5	74,5	50	60	60	
		OL7380-10	42	119	74,0	60	70	65	
S	400	OL7380-11	6	63,5	34,5	17	19	19	
		OL7380-12	8	63,5	34,5	19	19	19	
		OL7380-13	10	72,5	40,5	22	24	22	
		OL7380-14	12	74,5	42,5	24	27	24	
		OL7380-15	14	82,5	47,5	27	32	27	
		OL7380-16	16	86,5	50,5	30	36	32	
		OL7380-17	20	97,5	54,5	36	46	41	
	250	OL7380-18	25	106,5	58,5	46	50	46	
		OL7380-19	30	122,5	69,5	50	60	60	
		OL7380-20	38	136,5	75,5	60	70	65	

Adattatori DIN2353 / DIN2353 Adaptors

OL7385
OL7386

Valvole di ritegno guarnizione

Non-return valves rubber seal

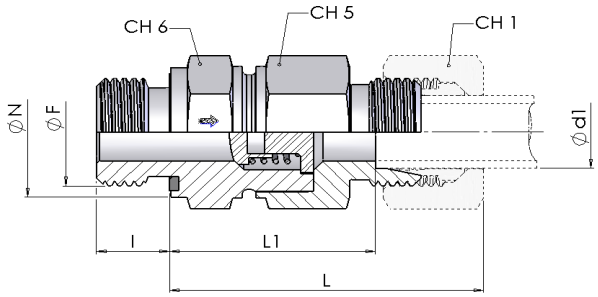

- Flusso verso il tubo
- *B.S.P. iniet*

Pressione di Apertura 1 Bar ± 20%

Opening pressure 1 BAR ± 20%

Filettatura / Thread:

BSPP (Form E DIN 3852)

W.P.		part number (body only)	Ø tube	Dimensions							
bar			d1	ØF	ØN	l	L1	L	CH1	CH5	CH6
L	250	**OL7385-01**	6	1/8"	14	8	28	42,5	14	17	17
		OL7385-02	8	1/4"	19	12	30	44,5	17	19	19
		OL7385-03	10	1/4"	19	12	38,5	53	19	24	22
		OL7385-04	12	3/8"	22	12	42,5	57	22	30	27
		OL7385-05	15	1/2"	27	14	45,5	60,5	27	32	27
	160	**OL7385-06**	18	1/2"	27	14	50	66	32	36	36
		OL7385-07	22	3/4"	32	16	55	71	36	46	41
	100	**OL7385-08**	28	1"	40	18	63	79,5	41	55	50
		OL7385-09	35	1" 1/4	50	20	69	90,5	50	60	60
		OL7385-10	42	1" 1/2	55	22	68,5	91	60	70	65
S	400	**OL7385-11**	6	1/4"	19	12	31,5	46	17	19	19
		OL7385-12	8	1/4"	19	12	31,5	46	19	19	19
		OL7385-13	10	3/8"	22	12	38	54	22	24	22
		OL7385-14	12	3/8"	22	12	41	57	24	27	24
		OL7385-15	14	1/2"	27	14	44,5	62	27	32	27
		OL7385-16	16	1/2"	27	14	48	66	30	36	32
		OL7385-17	20	3/4"	32	16	52	73,5	36	46	41
	250	**OL7385-18**	25	1"	40	18	54,5	78,5	46	50	46
		OL7385-19	30	1" 1/4	50	20	64	90,5	50	60	60
		OL7385-20	38	1" 1/2	55	22	69,5	100	60	70	65

Filettatura / Thread:

Metric (Form E DIN 3852)


W.P.		part number (body only)	Ø tube	Dimensions							
bar			d1	ØF	ØN	l	L1	L	CH1	CH5	CH6
L	250	**OL7386-01**	6	10x1	14	8	28	42,5	14	17	17
		OL7386-02	8	12x1,5	17	12	29	43,5	17	19	19
		OL7386-03	10	14x1,5	19	12	38,5	53	19	24	22
		OL7386-04	12	16x1,5	22	12	42,5	57	22	30	27
		OL7386-05	15	18x1,5	24	12	45,5	60,5	27	32	27
	160	**OL7386-06**	18	22x1,5	27	14	50	66	32	36	36
		OL7386-07	22	26x1,5	32	16	55	71	36	46	41
	100	**OL7386-08**	28	33x2	40	18	63	79,5	41	55	50
		OL7386-09	35	42x2	50	20	69	90,5	50	60	60
		OL7386-10	42	48x2	55	22	68,5	91	60	70	65
S	400	**OL7386-11**	6	12x1,5	17	12	31,5	46	17	19	19
		OL7386-12	8	14x1,5	19	12	31,5	46	19	19	19
		OL7386-13	10	16x1,5	22	12	38	54	22	24	22
		OL7386-14	12	18x1,5	24	12	41	57	24	27	24
		OL7386-15	14	20x1,5	26	14	44,5	62	27	32	27
		OL7386-16	16	22x1,5	27	14	48	66	30	36	32
		OL7386-17	20	27x2	32	16	52	73,5	36	46	41
	250	**OL7386-18**	25	33x2	40	18	54,5	78,5	46	50	46
		OL7386-19	30	42x2	50	20	64	90,5	50	60	60
		OL7386-20	38	48x2	55	22	69,5	100	60	70	65

Adattatori DIN2353 / DIN2353 Adaptors

OL7390
OL7391

Valvole di ritegno guarnizione

Non-return valves rubber seal

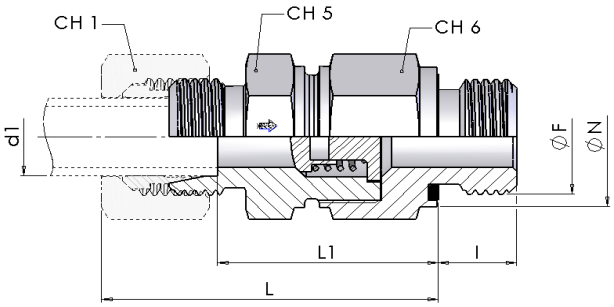

- Flusso verso il filetto
- *B.S.P. outlet*

Pressione di Apertura 1 Bar ± 20%
Opening pressure 1 BAR ± 20%

Filettatura / Thread:
BSPP (Form E DIN 3852)

W.P.		part number (body only)	Ø tube	Dimensions							
bar			d1	ØF	ØN	l	L1	L	CH1	CH5	CH6
L	250	OL7390-01	6	1/8"	14	8	26,5	41	14	17	17
		OL7390-02	8	1/4"	19	12	28,5	43	17	19	19
		OL7390-03	10	1/4"	19	12	38,5	53	19	22	24
		OL7390-04	12	3/8"	22	12	40,5	55	22	27	30
		OL7390-05	15	1/2"	27	14	42,5	57,5	27	27	32
	160	OL7390-06	18	1/2"	27	14	48	64	32	36	36
		OL7390-07	22	3/4"	32	16	56	72	36	41	46
	100	OL7390-08	28	1"	40	18	64	80,5	41	50	55
		OL7390-09	35	1" 1/4	50	20	70	91,5	50	60	60
		OL7390-10	42	1" 1/2	55	22	70,5	93	60	65	70
S	400	OL7390-11	6	1/4"	19	12	31,5	46	17	19	19
		OL7390-12	8	1/4"	19	12	31,5	46	19	19	19
		OL7390-13	10	3/8"	22	12	38	54	22	22	24
		OL7390-14	12	3/8"	22	12	41	57	24	24	27
		OL7390-15	14	1/2"	27	14	43,5	61	27	27	32
		OL7390-16	16	1/2"	27	14	46	64	30	32	36
		OL7390-17	20	3/4"	32	16	50	71,5	36	41	46
	250	OL7390-18	25	1"	40	18	54,5	78,5	46	46	50
		OL7390-19	30	1" 1/4	50	20	64	90,5	50	60	60
		OL7390-20	38	1" 1/2	55	22	71,5	102	60	65	70

Filettatura / Thread:
Metric (Form E DIN 3852)

W.P.		part number (body only)	Ø tube	Dimensions							
bar			d1	ØF	ØN	l	L1	L	CH1	CH5	CH6
L	250	OL7391-01	6	10x1	14	8	26,5	41	14	17	17
		OL7391-02	8	12x1,5	17	12	28,5	43	17	19	19
		OL7391-03	10	14x1,5	19	12	38,5	53	19	22	24
		OL7391-04	12	16x1,5	22	12	40,5	55	22	27	30
		OL7391-05	15	18x1,5	24	12	42,5	57,5	27	27	32
	160	OL7391-06	18	22x1,5	27	14	48	64	32	36	36
		OL7391-07	22	26x1,5	32	16	56	72	36	41	46
	100	OL7391-08	28	33x2	40	18	64	80,5	41	50	55
		OL7391-09	35	42x2	50	20	70	91,5	50	60	60
		OL7391-10	42	48x2	55	22	70,5	93	60	65	70
S	400	OL7391-11	6	12x1,5	17	12	31,5	46	17	19	19
		OL7391-12	8	14x1,5	19	12	31,5	46	19	19	19
		OL7391-13	10	16x1,5	22	12	38	54	22	22	24
		OL7391-14	12	18x1,5	24	12	41	57	24	24	27
		OL7391-15	14	20x1,5	26	14	43,5	61	27	27	32
		OL7391-16	16	22x1,5	27	14	46	64	30	32	36
		OL7391-17	20	27x2	32	16	50	71,5	36	41	46
	250	OL7391-18	25	33x2	40	18	54,5	78,5	46	46	50
		OL7391-19	30	42x2	50	20	64	90,5	50	60	60
		OL7391-20	38	48x2	55	22	71,5	102	60	65	70